


# K-SCHALTVENTILE 3/2 MULTIFIX

On-off valves (3/2-way valves)

**HANSA FLEX**

## Properties

|                                 |  |
|---------------------------------|--|
| <b>Input pressure</b>           | Min. 2 bar, max. 10 bar                            |
| <b>Media temperature</b>        | max. 60 °C   |
| <b>Ambient temperature</b>      | Max. 60 °C   |
| <b>Electrical connection</b>    | Device plug PG 9, type B, EN 175301-803            |
| <b>Protection IP</b>            | IP 65 (P 54) acc. to DIN 40050                     |
| <b>cyclic duration relative</b> | 100 %  |
| <b>Vent port</b>                | Silencer G 1/4                                     |
| <b>Sealant</b>                  | NBR  |
| <b>Housing</b>                  | Die-cast zinc                                      |
| <b>Flow rate measurement</b>    | At P1 = 6 bar and pressure drop $\Delta p = 1$ bar |

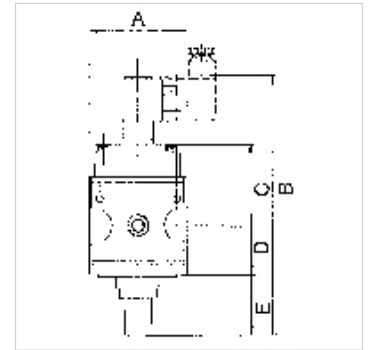

## Note

Further information on request

## Description

Pneumatic systems or parts of systems can be switched on and off by means of an electrical signal. When they are switched off, the system is relieved at the same time.

## Ordering information

On-off valves are also available in a pneumatically operated version. Please ask for more information.

## Item

| Identification | Thread | Flow rate (L/min) | Solenoid                 | A (mm) | B        | C (mm) | D (mm) | E (mm) | Size |
|----------------|--------|-------------------|--------------------------|--------|----------|--------|--------|--------|------|
| K- 07 25 11 65 | G 1/4  | 900               | 24 V AC, 50 Hz           | 47,8   | 138.7 mm | 43,7   | 26,0   | 17,5   | 1    |
| K- 07 25 11 66 | G 1/4  | 900               | 230 V AC, 50 Hz          | 47,8   | 138.7 mm | 43,7   | 26,0   | 17,5   | 1    |
| K- 07 25 11 67 | G 1/4  | 900               | 110 V AC, 50 Hz          | 47,8   | 138.7 mm | 43,7   | 26,0   | 17,5   | 1    |
| K- 07 25 11 68 | G 1/4  | 900               | 24 V DC                  | 47,8   | 138.7 mm | 43,7   | 26,0   | 17,5   | 1    |
| K- 07 25 11 69 | G 1/2  | 4000              | 24 V AC, 50 Hz / 12 V DC | 68,8   | 185.0 mm | 56,2   | 33,5   | 44,1   | 2    |
| K- 07 25 11 70 | G 1/2  | 4000              | 230 V AC, 50 Hz          | 68,8   | 185.0 mm | 56,2   | 33,5   | 44,1   | 2    |
| K- 07 25 11 71 | G 1/2  | 4000              | 110 V AC, 50 Hz          | 68,8   | 185.0 mm | 56,2   | 33,5   | 44,1   | 2    |
| K- 07 25 11 72 | G 1/2  | 4000              | 24 V DC                  | 68,8   | 185.0 mm | 56,2   | 33,5   | 44,1   | 2    |

## Accessories

**K-SCHALLDAE SINTERBR GE MS1** Silencers, sintered bronze, with brass hexagon nut and brass thread

## Spare parts

|                                |                 |
|--------------------------------|-----------------|
| K-KOPPELPAKET MEHR             | Coupling packet |
| K-KOPPELPAKET SCHMA            | Coupling packet |
| K-GERAETESTECKER               | Coupling socket |
| K-HALTERBAUSATZ MULTIFIX       | Holder          |
| K-MAGNETSPULE MULTIFIX         | Solenoid        |
| K-WV 3/2 VORSTEU HAND MULTIFIX | 3/2-way valve   |