
K-VT SCHMAL MULTIFIX

Manifolds - narrow design

Properties

Input pressure	Max. 16 bar
Media temperature	max. 60 °C
Ambient temperature	Max. 60 °C
Sealant	NBR
Housing	Die-cast zinc
Flow rate measurement	At P1 = 6 bar and pressure drop Δp = 1 bar



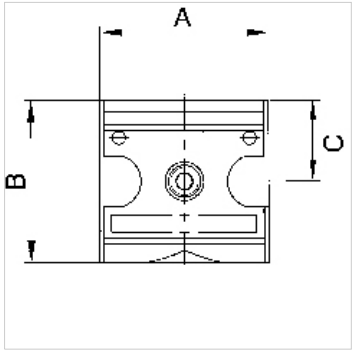

Note

Flow rate l/min at P → A

Further information on request

Description

Wide or narrow, four-way manifolds.

Item

Identification	Outlets	Thread	Flow rate (L/min)	A (mm)	B	C (mm)
K- 07 25 11 82	3 x 1/4, 1 x 1/8	G 1/4	3300	34,8	52.0 mm	26,0
K- 07 25 11 83	1 x 3/8, 2 x 1/4, 1 x 1/8	G 1/2	11000	38,8	67.0 mm	33,5

Accessories

K-DRS WECHSELKONTAK ANFLANSCHBAR DS	Pressure switches, changeover type, suitable for flange mounting K-07302861
K-ZUBEH HANSA	Accessories for pressure switch HANSA

Spare parts

K-KOPPELPAKET MEHR	Coupling packet
K-KOPPELPAKET SCHMA	Coupling packet

Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.