


# K-VT SCHMAL MULTIFIX

Manifolds - narrow design

**HANSA FLEX**

## Properties

<b>Input pressure</b>	Max. 16 bar
<b>Media temperature</b>	max. 60 °C
<b>Ambient temperature</b>	Max. 60 °C
<b>Sealant</b>	NBR
<b>Housing</b>	Die-cast zinc
<b>Flow rate measurement</b>	At P1 = 6 bar and pressure drop $\Delta p = 1$ bar

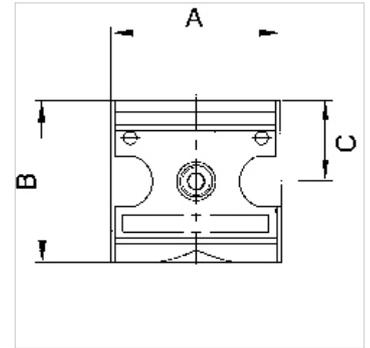

## Note

Flow rate l/min at P → A  
Further information on request

## Description

Wide or narrow, four-way manifolds.

## Item

Identification	Outlets	Thread	Flow rate (L/min)	A (mm)	B	C (mm)
K- 07 25 11 82	3 x 1/4, 1 x 1/8	G 1/4	3300	34,8	52.0 mm	26,0
K- 07 25 11 83	1 x 3/8, 2 x 1/4, 1 x 1/8	G 1/2	11000	38,8	67.0 mm	33,5

## Accessories

K-DRS WECHSELKONTAK ANFLANSCHBAR DS	Pressure switches, changeover type, suitable for flange mounting K-07302861
K-ZUBEH HANSA	Accessories for pressure switch HANSA

## Spare parts

K-KOPPELPAKET MEHR	Coupling packet
K-KOPPELPAKET SCHMA	Coupling packet