

K-ANFAV MULTIFIX MINI

Start-up valves

Properties

Input pressure	Min. 2.5 bar, max. 16 bar
Media temperature	max. 60 °C
Ambient temperature	Max. 60 °C
Flow rate	1600 l/min
Sealant	NBR
Housing	Die-cast zinc
Flow rate measurement	At P1 = 6 bar and pressure drop Δp = 1 bar

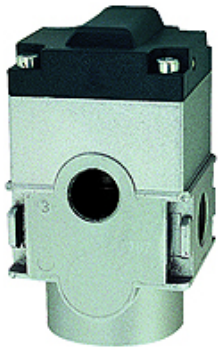

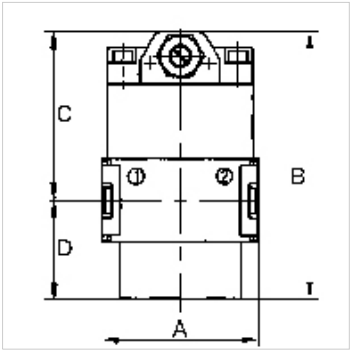

Note

If several devices in the »multifix-mini« Series are assembled together, the maximum working pressure is 12 bar.
Further information on request

Description

Seat valves operated by secondary pressure for controlled pressurisation of pneumatic systems. The full cross-section of the regulator is opened at 50% of the input pressure. With adjustable restrictor!

Item

Identification	Thread	A (mm)	B	C (mm)	D (mm)
K- 07 25 11 53	G 1/4	45,0	77.5 mm	48,5	29,0

Accessories

K-HALTERBAUSATZ	Holder

Spare parts

K-KOPPELPAKET MEHR	Coupling packet

Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.