


# K-SCHALTVENTILE 3/2 MULTIFIX MINI

On-off valves (3/2-way valves)

**HANSA FLEX**

## Properties

Input pressure	Min. 2 bar, max. 10 bar
Media temperature	max. 60 °C
Ambient temperature	Max. 60 °C
Electrical connection	Device plug PG 9, type B, EN 175301-803
Protection IP	IP 65 (P 54) acc. to DIN 40050
Flow rate	1600 l/min
cyclic duration relative	100 %
Vent port	Silencer G 1/4
Sealant	NBR
Housing	Die-cast zinc
Flow rate measurement	At P1 = 6 bar and pressure drop $\Delta p = 1$ bar

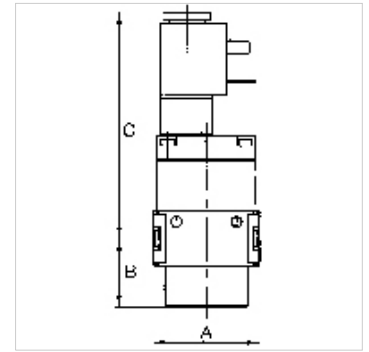

## Note

If several devices in the »multifix-mini« Series are assembled together, the maximum working pressure is 12 bar.  
Further information on request

## Description

Pneumatic systems or parts of systems can be switched on and off by means of an electrical signal. When they are switched off, the system is relieved at the same time.

Item						
Identification	Thread	Solenoid	A (mm)	B	C (mm)	Size
K- 07 25 11 62	G 1/4	230 V AC, 50 Hz	45,0	29.0 mm	96,0	0
K- 07 25 11 63	G 1/4	110 V AC, 50 Hz	45,0	29.0 mm	96,0	0
K- 07 25 11 64	G 1/4	24 V DC	45,0	29.0 mm	96,0	0

## Spare parts

K-KOPPELPAKET MEHR	Coupling packet
K-GERAETESTECKER	Coupling socket
K-AUTOMAT ABLASSVENTIL	Automatic drain valve
K-MAGNETSPULE MULTIFIX	Solenoid
K-SCHALLDAE SINTERBR SCHLITZ	Silencers, sintered bronze, slotted