

K-VT MULTIFIX MINI
Manifold

Properties

Input pressure	Max. 16 bar
Media temperature	max. 60 °C
Ambient temperature	Max. 60 °C
Flow rate	P-A = 2700 l/min\nP-B and P-C = 1300 l/min
Sealant	NBR
Housing	Die-cast zinc
Flow rate measurement	At P1 = 6 bar and pressure drop Δp = 1 bar

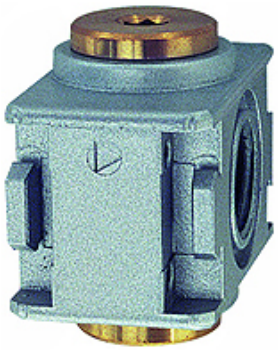

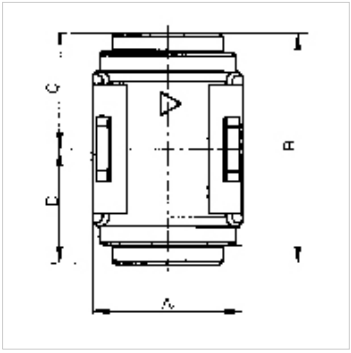

Note

If several devices in the »multifix-mini« Series are assembled together, the maximum working pressure is 12 bar.
Further information on request

Description

Narrow, two-way manifold with two G 1/8 outlets.

Item

Identification	Thread	A (mm)	B	C (mm)	D (mm)
K- 07 25 11 81	G 1/4	23,0	36.0 mm	18,0	18,0

Spare parts

K-KOPPELPAKET MEHR	Coupling packet

Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.