
K-NEBELOELER MINI

Mini oil-mist lubricator

Properties

Operating pressure	min. 2 bar - max. 6 bar
Media temperature	max. 50 °C
Ambient temperature	Max. 50 °C
Mounting position/flow direction	Oil intake at the lowest point/any
Oil container	Polycarbonate
Oil grade	CL 32 acc. to DIN 51517 - ISO VG 32



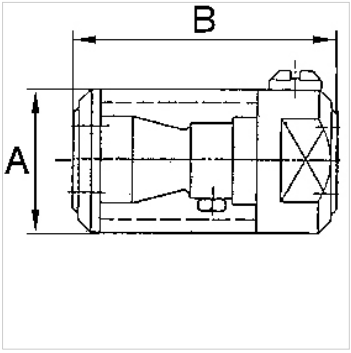

Note

Further information on request

Description

For mounting on pneumatic impact tools (nail drivers, tackers, screwdrivers) which work intermittently. Also suitable for tools with continuous compressed air demand (grinding and polishing machines). Fixed drip rate: Approx. 0.4 cm3 per 100 work cycles, one filling = 3000 work cycles. Oil consumption in continuous operation (at 6 bar): 0.15 cm3 / Nm3 (varies depending on ambient temperature and oil used).

Item

Identification	Thread	A (mm)	B	DN
K- 07 25 09 11	G 1/4	33,0	60.0 mm	8
K- 07 25 09 12	G 3/8	33,0	60.0 mm	8

Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.