K-NEBELOELER PC-BEHAELTER STANDARD

Oil-mist lubricators with polycarbonate bowl

HANSA-FLEX

Properties

Input pressure	Max. 16 bar (polycarbonate bowl / bowl guard), Max. 25 bar (metal bowl)
Media temperature	max. 60 °C
Ambient temperature	Max. 60 °C
Sealant	NBR
Housing	Die-cast zinc, painted silver
Dropper	PA (polycarbonate bowl), Zinc-glass-NBR (metal bowl)
Oil grade	CL 32 acc. to DIN 51517 - ISO VG 32
Flow rate measurement	At P2 = 6 bar and pressure drop Δp = 1 bar
More information	User manual on request



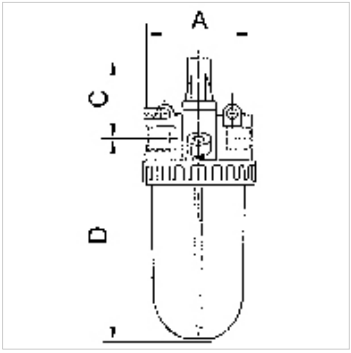

Description

Proportional lubricators, oil can be filled under pressure.

Item

Identification	Thread	Flow rate (L/min)	A (mm)	C (mm)	D (mm)	DN
K- 07 25 08 87	G 1/4	1200	50,0	51,0	118,0	6
K- 07 25 08 90	G 3/8	1200	50,0	51,0	118,0	6
K- 07 25 08 93	G 3/8	2400	70,0	51,0	129,5	10
K- 07 25 08 96	G 1/2	4000	79,0	55,0	157,0	15
K- 07 25 08 99	G 3/4	9000	102,0	58,0	160,0	20
K- 07 25 09 02	G 1	9000	90,0	58,0	160,0	25
K- 07 25 09 05	G 1 1/4	9000	137,0	70,0	232,0	40
K- 07 25 09 08	G 1 1/2	9000	125,0	70,0	232,0	45

Spare parts

K-HALTERBAUSATZ STANDARD	Holder
K-TROPFAUFSATZ POLYCARBO	Drip attachment polycarbonate
K-SCHUTZKORB G	Protective cage
K-XV AGM MS NI	Double nipples, parallel male thread, nickel-plated brass
K-LOESBARE DOPPELNIPPEL MS	Double nipples
K-RD NIPPEL MS NI	Reducing nipples - nickel-plated brass
K-TROPFAUFSATZ METALL	Drip attachment metal

Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.