
# K-NEBELOELER PC-BEHAELTER STANDARD

Oil-mist lubricators with polycarbonate bowl

## Properties

| | |
|---|---|
| **Input pressure** | Max. 16 bar (polycarbonate bowl / bowl guard), Max. 25 bar (metal bowl) |
| **Media temperature** | max. 60 °C |
| **Ambient temperature** | Max. 60 °C |
| **Sealant** | NBR |
| **Housing** | Die-cast zinc, painted silver |
| **Dropper** | PA (polycarbonate bowl), Zinc-glass-NBR (metal bowl) |
| **Oil grade** | CL 32 acc. to DIN 51517 - ISO VG 32 |
| **Flow rate measurement** | At P2 = 6 bar and pressure drop Δp = 1 bar |
| **More information** | User manual on request |



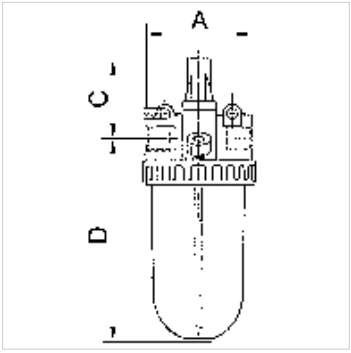


## Description

Proportional lubricators, oil can be filled under pressure.

## Item

| Identification | Thread | Flow rate (L/min) | A (mm) | C (mm) | D (mm) | DN |
|---|---|---|---|---|---|---|
| **K- 07 25 08 87** | G 1/4 | 1200 | 50,0 | 51,0 | 118,0 | 6 |
| **K- 07 25 08 90** | G 3/8 | 1200 | 50,0 | 51,0 | 118,0 | 6 |
| **K- 07 25 08 93** | G 3/8 | 2400 | 70,0 | 51,0 | 129,5 | 10 |
| **K- 07 25 08 96** | G 1/2 | 4000 | 79,0 | 55,0 | 157,0 | 15 |
| **K- 07 25 08 99** | G 3/4 | 9000 | 102,0 | 58,0 | 160,0 | 20 |
| **K- 07 25 09 02** | G 1 | 9000 | 90,0 | 58,0 | 160,0 | 25 |
| **K- 07 25 09 05** | G 1 1/4 | 9000 | 137,0 | 70,0 | 232,0 | 40 |
| **K- 07 25 09 08** | G 1 1/2 | 9000 | 125,0 | 70,0 | 232,0 | 45 |

## Spare parts

| | |
|---|---|
| **K-HALTERBAUSATZ STANDARD** | Holder |
| **K-TROPFAUFSATZ POLYCARBO** | Drip attachment polycarbonate |
| **K-SCHUTZKORB G** | Protective cage |
| **K-XV AGM MS NI** | Double nipples, parallel male thread, nickel-plated brass |
| **K-LOESBARE DOPPELNIPPEL MS** | Double nipples |
| **K-RD NIPPEL MS NI** | Reducing nipples - nickel-plated brass |
| **K-TROPFAUFSATZ METALL** | Drip attachment metal |

*Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.*