
K-WTEH 2-TLG PC SCHU H ABL STANDARD

Service units with polycarbonate bowl, bowl guard and semi-automatic drain valve

Properties

Input pressure	Max. 16 bar (polycarbonate bowl / bowl guard), Max. 25 bar (metal bowl)
Control range	0.5 to 10 bar (polycarbonate bowl / bowl guard) 0.5 to 16 bar (metal bowl)
Media temperature	max. 60 °C
Ambient temperature	Max. 60 °C
Pore size in filter element	5 µm (Size 1 / Size 3), 40 µm (Size 2 / Size 4)
Sealant	NBR
Housing	Die-cast zinc / Aluminium, painted silver
Dropper	PA (polycarbonate bowl), Zinc-glass-NBR (metal bowl)
Flow rate measurement	At P1 = 8 bar, P2 = 6 bar and pressure drop Δp = 1 bar



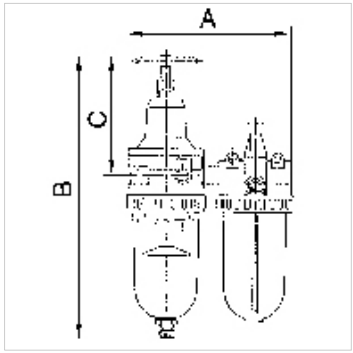

Note

Further information on request

Description

Two-piece service units consisting of a reversible diaphragm pressure regulator, independent of inlet pressure, with self-relieving design, combined with a centrifugal separator and a proportional lubricator.

Item

Identification	Thread	Flow rate (L/min)	A (mm)	B	C (mm)	DN	Ø pressure gauge
K- 07 25 14 95	G 1/4	600	117,0	236.2 mm	106,5	6	50
K- 07 25 14 98	G 3/8	600	117,0	236.2 mm	106,5	6	50
K- 07 25 15 01	G 3/8	800	150,0	266.4 mm	120,5	10	63
K- 07 25 15 04	G 1/2	2100	175,0	299.4 mm	130,0	15	63
K- 07 25 15 07	G 3/4	4000	220,0	452.0 mm	190,6	20	63
K- 07 25 15 10	G 1	4000	220,0	452.0 mm	190,6	25	63

Spare parts

K-HALTERBAUSATZ STANDARD	Holder
K-SCHUTZKORB G	Protective cage
K-VERSCHLEI-SATZ	Set of wearing parts
K-FILTERELEMENT	Filter element
K-TROPFAUFSATZ POLYCARBO	Drip attachment polycarbonate
K-XV AGM MS NI	Double nipples, parallel male thread, nickel-plated brass
K-RD NIPPEL MS NI	Reducing nipples - nickel-plated brass
K-LOESBARE DOPPELNIPPEL MS	Double nipples
K-TROPFAUFSATZ METALL	Drip attachment metal
K-ABLASSVENTIL AUTO	Fully-automatic drain valve with Adapter G 1/8
K-AUTOMAT ABLASSVENTIL	Automatic drain valve

Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.