# K-WTEH 3-TLG PC H ABLV STANDARD


Service units with polycarbonate bowl and semi-automatic drain valve

HANSA-FLEX

## Properties

| | |
|---|---|
| **Input pressure** | Max. 16 bar (polycarbonate bowl / bowl guard), Max. 25 bar (metal bowl) |
| **Control range** | 0.5 to 10 bar (polycarbonate bowl / bowl guard) 0.5 to 16 bar (metal bowl) |
| **Media temperature** | max. 60 °C |
| **Ambient temperature** | Max. 60 °C |
| **Pore size in filter element** | 5 µm (G 1/4 / G 3/8 / G 1/2), 40 µm (G 3/8 / G 3/4 / G 1 / G 1 1/4 / G 1 1/2) |
| **Sealant** | NBR |
| **Housing** | Die-cast zinc / Aluminium, painted silver |
| **Dropper** | PA (polycarbonate bowl), Zinc-glass-NBR (metal bowl) |
| **Flow rate measurement** | At P1 = 8 bar, P2 = 6 bar and pressure drop Δp = 1 bar |
| **More information** | User manual on request |



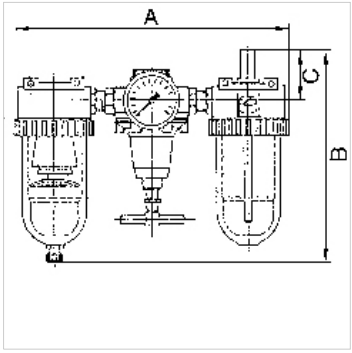


## Description

Three-piece service units consisting of a reversible diaphragm pressure regulator, independent of inlet pressure, with self-relieving design, centrifugal separator and proportional lubricator.

## Item

| Identification | Thread | Flow rate (L/min) | A (mm) | B | C (mm) | DN | Ø pressure gauge |
|---|---|---|---|---|---|---|---|
| **K- 07 25 14 49** | G 1/4 | 600 | 172,0 | 182.6 mm | 51,0 | 6 | 50 |
| **K- 07 25 14 56** | G 3/8 | 600 | 185,0 | 182.6 mm | 51,0 | 6 | 50 |
| **K- 07 25 14 59** | G 3/8 | 1400 | 232,0 | 196.7 mm | 51,0 | 6 | 50 |
| **K- 07 25 14 62** | G 1/2 | 3200 | 259,0 | 223.4 mm | 55,0 | 15 | 63 |
| **K- 07 25 14 65** | G 3/4 | 3200 | 302,0 | 227.9 mm | 58,0 | 20 | 63 |
| **K- 07 25 14 68** | G 1 | 3200 | 302,0 | 227.9 mm | 58,0 | 25 | 63 |
| **K- 07 25 14 71** | G 1 1/4 | 5000 | 395,0 | 313.4 mm | 70,0 | 25 | 63 |
| **K- 07 25 14 74** | G 1 1/2 | 5000 | 395,0 | 313.4 mm | 70,0 | 35 | 63 |

## Spare parts

| | |
|---|---|
| **K-HALTERBAUSATZ STANDARD** | Holder |
| **K-SCHUTZKORB G** | Protective cage |
| **K-VERSCHLEI-SATZ** | Set of wearing parts |
| **K-FILTERELEMENT** | Filter element |
| **K-TROPFAUFSATZ POLYCARBO** | Drip attachment polycarbonate |
| **K-LOESBARE DOPPELNIPPEL MS** | Double nipples |
| **K-XV AGM MS NI** | Double nipples, parallel male thread, nickel-plated brass |
| **K-RD NIPPEL MS NI** | Reducing nipples - nickel-plated brass |
| **K-TROPFAUFSATZ METALL** | Drip attachment metal |
| **K-ABLASSVENTIL AUTO** | Fully-automatic drain valve with Adapter G 1/8 |
| **K-AUTOMAT ABLASSVENTIL** | Automatic drain valve |

*Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.*