
K-NEBELOELER PC-BEHAEL STANDARD-MIN

Oil-mist lubricators with polycarbonate bowl

Properties

Input pressure	Max. 16 bar (polycarbonate bowl), Max. 25 bar (metal bowl)
Media temperature	max. 60 °C
Ambient temperature	Max. 60 °C
Flow rate	650 l/min
Sealant	NBR
Housing	Die-cast zinc, painted silver
Dropper	PA (polycarbonate bowl), Zinc-glass-NBR (metal bowl)
Oil grade	CL 32 acc. to DIN 51517 - ISO VG 32
Flow rate measurement	At P1 = 6 bar and pressure drop Δp = 1 bar
More information	User manual on request



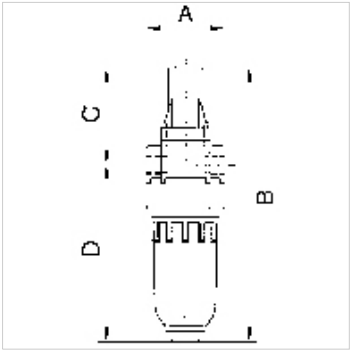

Description

Proportional lubricators in compact design, oil can be filled under pressure.

Item

Identification	Thread	A (mm)	B	C (mm)	D (mm)	DN
K- 07 25 08 83	G 1/8	40,0	144.5 mm	49,5	95,0	5
K- 07 25 08 85	G 1/4	40,0	144.5 mm	49,5	95,0	5

Spare parts

K-ERSATZBEHAELTER MULTI MINI	Spare tank »multifix-mini« & »standard-mini«
K-TROPFAUFSATZ POLYCARBO	Drip attachment polycarbonate
K-TROPFAUFSATZ METALL	Drip attachment metal
K-LOESBARE DOPPELNIPPEL MS	Double nipples
K-XV AGM MS NI	Double nipples, parallel male thread, nickel-plated brass

Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.