


# K-WTEH 3-TLG MET MANO T STANDARD-MI

Service units, 3-piece with metal bowl and pressure gauge, metal sight dome

**HANSA FLEX**

## Properties

|                                    |  |
|------------------------------------|--|
| <b>Input pressure</b>              | Max. 16 bar (polycarbonate bowl), Max. 25 bar (metal bowl)                             |
| <b>Media temperature</b>           | max. 60 °C   |
| <b>Ambient temperature</b>         | Max. 60 °C   |
| <b>Flow rate</b>                   | 350 l/min (2-piece), 300 l/min (3-piece)   |
| <b>Pore size in filter element</b> | 5 µm   |
| <b>Sealant</b>                     | NBR  |
| <b>Housing</b>                     | Die-cast zinc, painted silver  |
| <b>Dropper</b>                     | PA (polycarbonate bowl), Zinc-glass-NBR (metal bowl)                                   |
| <b>Drain valve</b>                 | Semi-automatic for variant with polycarbonate bowl, Manual for variant with metal bowl |
| <b>Flow rate measurement</b>       | At P1 = 8 bar, P2 = 6 bar and pressure drop $\Delta p$ = 1 bar                         |

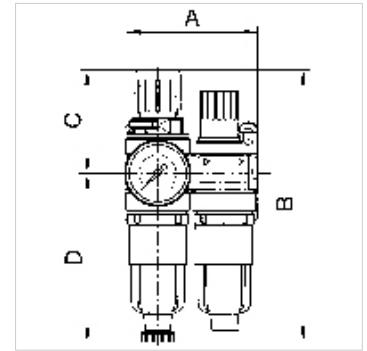

## Note

Further information on request

## Description

Compact, two or three-piece service units consisting of a reversible diaphragm pressure regulator, independent of inlet pressure, with self-relieving design, combined with a centrifugal separator and a proportional lubricator.

## Item

| Identification | Thread | Control range | A (mm) | B        | C (mm) | D (mm) | DN |
|----------------|--------|---------------|--------|----------|--------|--------|----|
| K- 07 25 14 53 | G 1/8  | 0.5 - 10 bar  | 130,0  | 143.0 mm | 49,0   | 94,0   | 5  |
| K- 07 25 14 55 | G 1/4  | 0.5 - 10 bar  | 130,0  | 143.0 mm | 49,0   | 94,0   | 5  |

## Spare parts

|                                |   |
|--------------------------------|---|
| K-HALTERBAUSATZ                | Holder  |
| K-SCHALTTAFELMUTTER            | Nut   |
| K-ERSATZBEHAELTER MULTI MINI   | Spare tank »multifix-mini« & »standard-mini«              |
| K-PC-BEHAELTER FILTER MULTIFIX | Polycarbonate tank filter                                 |
| K-VERSCHLEI-SATZ               | Set of wearing parts                                      |
| K-FILTERELEMENT                | Filter element  |
| K-AUTOMAT ABLASSVENTIL         | Automatic drain valve                                     |
| K-TROPFAUFSATZ POLYCARBO       | Drip attachment polycarbonate                             |
| K-TROPFAUFSATZ METALL          | Drip attachment metal                                     |
| K-LOESBARE DOPPELNIPPEL MS     | Double nipples  |
| K-XV AGM MS NI                 | Double nipples, parallel male thread, nickel-plated brass |