


### Properties

Operating pressure 2 - 25 bar

Flow rate measurement At P1 = 6 bar and pressure drop  $\Delta p = 1$  bar

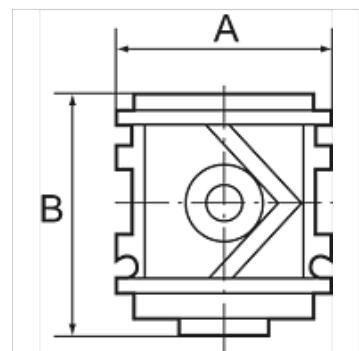

### Note

Further information on request

### Description

For slow pressure build-up in pneumatic systems, e.g. after an emergency stop. The valve opens to full flow at approximately 60% of the set operating pressure. The filling time can be set by turning the adjusting screw. Used in combination with multi-piece service units.

### Item

Identification	Thread	Flow rate (L/min)	A (mm)	B	Operating pressure
K-07 25 11 84	G 1/4	1200	48,0	54.0 mm	2 - 25 bar
K-07 25 11 85	G 3/8	1400	48,0	54.0 mm	2 - 25 bar
K-07 25 11 86	G 1/2	3800	70,0	72.0 mm	2 - 25 bar
K-07 25 11 87	G 3/4	4200	70,0	72.0 mm	2 - 25 bar
K-07 25 11 88	G 1	4200	124,0	72.0 mm	2 - 25 bar