


# K-DRG VARIOBLOC

Pressure regulators

**HANSA FLEX**

## Properties

<b>Input pressure</b>	Max. 25 bar
<b>Media temperature</b>	max. 50 °C
<b>Ambient temperature</b>	Max. 50 °C
<b>Sealant</b>	NBR
<b>Spring bonnet</b>	POM
<b>Housing</b>	Die-cast zinc
<b>Diaphragm</b>	NBR
<b>Flow rate measurement</b>	At P1 = 10 bar, P2 = 6 bar and pressure drop $\Delta p = 1$ bar

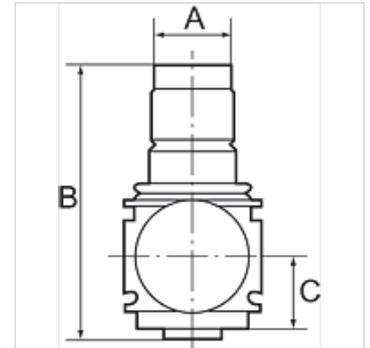

## Note

Further information on request

## Description

Reversible diaphragm pressure regulators, independent of inlet pressure, with self-relieving design. The pressure setting can be locked by pushing the knob down. Approved series in modern industrial design, with the following key benefits: Simple handling, Convenient modular assembly thanks to innovative fasteners, Excellent flow values.

## Ordering information

Pressure regulators are also available in lockable version. Please ask for more information.

## Item

Identification	Thread	Control range	Flow rate (L/min)	A (mm)	B	C (mm)
K- 07 25 04 18	G 1/4	0.5 - 6 bar	2000	48,0	98.0 mm	26,0
K- 07 25 04 19	G 1/4	0.5 - 10 bar	2000	48,0	98.0 mm	26,0
K- 07 25 04 20	G 1/4	0.5 - 16 bar	2000	48,0	98.0 mm	26,0
K- 07 25 04 21	G 3/8	0.5 - 6 bar	3200	48,0	98.0 mm	26,0
K- 07 25 04 22	G 3/8	0.5 - 10 bar	3200	48,0	98.0 mm	26,0
K- 07 25 04 23	G 3/8	0.5 - 16 bar	3200	48,0	98.0 mm	26,0
K- 07 25 04 24	G 1/2	0.5 - 6 bar	7000	70,0	134.0 mm	32,5
K- 07 25 04 25	G 1/2	0.5 - 10 bar	7000	70,0	134.0 mm	32,5
K- 07 25 04 26	G 1/2	0.5 - 16 bar	7000	70,0	134.0 mm	32,5
K- 07 25 04 27	G 3/4	0.5 - 6 bar	8000	70,0	134.0 mm	32,5
K- 07 25 04 28	G 3/4	0.5 - 10 bar	8000	70,0	134.0 mm	32,5
K- 07 25 04 29	G 3/4	0.5 - 16 bar	8000	70,0	134.0 mm	32,5
K- 07 25 04 30	G 1	0.5 - 6 bar	8000	124,0	134.0 mm	32,5
K- 07 25 04 31	G 1	0.5 - 10 bar	8000	124,0	134.0 mm	32,5
K- 07 25 04 32	G 1	0.5 - 16 bar	8000	124,0	134.0 mm	32,5

## Spare parts

**K-VERSCHLEI-SATZ VARIOBLOC** Set of wearing parts