


# K-FI METALLBEHAELTER SICHT VARIBLOC

Filters with metal bowl incl. sight glass

**HANSA FLEX**

## Properties

<b>Input pressure</b>	Max. 16 bar (polycarbonate bowl), Max. 20 bar (metal bowl)
<b>Media temperature</b>	max. 50 °C
<b>Ambient temperature</b>	Max. 50 °C (polycarbonate bowl), Max. 80 °C (metal bowl)
<b>Pore size in filter element</b>	40 µm
<b>Sealant</b>	NBR
<b>Housing</b>	Die-cast zinc
<b>Drain valve</b>	Manual
<b>Flow rate measurement</b>	At P1 = 6 bar and pressure drop $\Delta p = 1$ bar

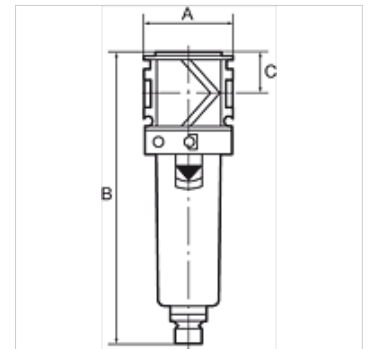

## Note

Further information on request

## Description

Centrifugal separators with a sintered filter element. Filtration takes place in a 2-stage process comprising cyclone separation (condensate) and a PE filter element (particles). <br>Approved series in modern industrial design, with the following key benefits: Simple handling, Convenient modular assembly thanks to innovative fasteners, Excellent flow values.

## Ordering information

Filters are also available with bowl guard or metal bowl.

Item					
Identification	Thread	Flow rate (L/min)	A (mm)	B	C (mm)
K- 07 25 06 26	G 1/4	1800	48,0	155.0 mm	22,0
K- 07 25 06 28	G 3/8	2000	48,0	155.0 mm	22,0
K- 07 25 06 30	G 1/2	3200	70,0	202.0 mm	26,0
K- 07 25 06 32	G 3/4	3500	70,0	202.0 mm	26,0
K- 07 25 06 34	G 1	3500	124,0	202.0 mm	26,0

## Spare parts

K-ERSATZBEHAELTER VARIOBLOC POLY	Spare tank Polycarbonat
K-FILTERELEMENT VARIOBLOC	Filter element
K-ABLASSVENTIL AUTO	Fully-automatic drain valve with Adapter G 1/8