

# K-3/2-BKR VARIOBLOC

Ball valves


**HANSA FLEX**

## Properties

**Ambient temperature** Max. 80 °C

**Working pressure** Max. 20 bar

**Flow rate measurement** At P1 = 6 bar and pressure drop  $\Delta p = 1$  bar

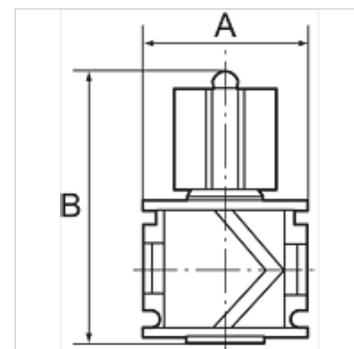

## Note

Further information on request

## Description

Used as the main shut-off element, especially for flanging onto the start of a variobloc service unit. With pressure relief and silencer. Can be locked with a standard padlock.

## Item

Identification	Thread	Flow rate (L/min)	A (mm)	B
K- 07 25 11 89	G 1/4	4300	48,0	80.0 mm
K- 07 25 11 90	G 3/8	4400	48,0	80.0 mm
K- 07 25 11 91	G 1/2	9000	70,0	92.0 mm
K- 07 25 11 92	G 3/4	11000	70,0	92.0 mm
K- 07 25 11 93	G 1	11000	124,0	92.0 mm