K-SCHALTVENTILE 3/2 VAROBLOC


On-off valves (3/2-way valves)

HANSA-FLEX

Properties

Protection IP	IP 65 acc. to DIN 40050
Working pressure	3 to 10 bar
Flow rate measurement	At P1 = 6 bar and pressure drop Δp = 1 bar



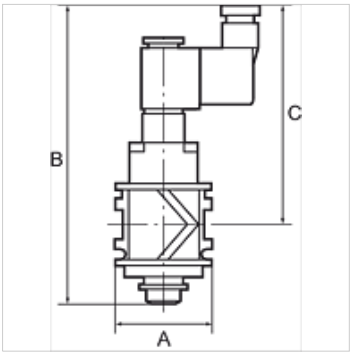

Note

Further information on request

Description

For pressurising and relieving pneumatic systems. Ideal as the main "on" valve for service units. The pressure in the line is exhausted when the valve is switched off.

Item

Identification	Thread	Flow rate (L/min)	A (mm)	Connection	B	C (mm)	Voltage
K- 07 25 11 94	G 1/4	2200	48,0	Device plug PG 9, type B, EN 175301-803	147.0 mm	108,0	24 V DC
K- 07 25 11 95	G 3/8	2600	48,0	Device plug PG 9, type B, EN 175301-803	147.0 mm	108,0	24 V DC
K- 07 25 11 96	G 1/2	3300	70,0	Device plug PG 9, type B, EN 175301-803	157.0 mm	113,0	24 V DC
K- 07 25 11 97	G 3/4	3800	70,0	Device plug PG 9, type B, EN 175301-803	157.0 mm	113,0	24 V DC
K- 07 25 11 98	G 1	3800	124,0	Device plug PG 9, type B, EN 175301-803	157.0 mm	113,0	24 V DC

Spare parts

K-MAGNETSPULE VARIOBLOC	Solenoid
K-GERAETESTECKER	Coupling socket

Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.