



K-SCHALTVENTILE 3/2 VAROBLOC

On-off valves (3/2-way valves)



Properties

| | |
|-----------------------|--|
| Protection IP | IP 65 acc. to DIN 40050 |
| Working pressure | 3 to 10 bar |
| Flow rate measurement | At P1 = 6 bar and pressure drop $\Delta p = 1$ bar |

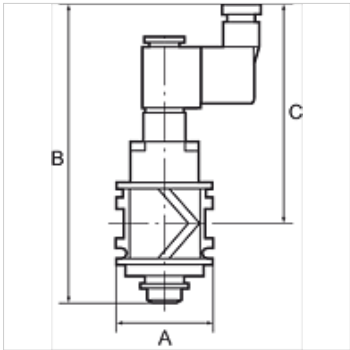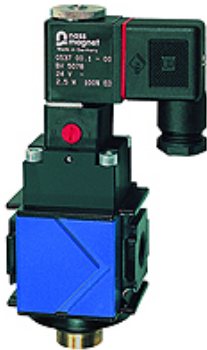

Note

Further information on request

Description

For pressurising and relieving pneumatic systems. Ideal as the main "on" valve for service units. The pressure in the line is exhausted when the valve is switched off.

| Item | | | | | | | |
|----------------|--------|-------------------|--------|---|----------|--------|---------|
| Identification | Thread | Flow rate (L/min) | A (mm) | Connection | B | C (mm) | Voltage |
| K- 07 25 11 94 | G 1/4 | 2200 | 48,0 | Device plug PG 9, type B, EN 175301-803 | 147.0 mm | 108,0 | 24 V DC |
| K- 07 25 11 95 | G 3/8 | 2600 | 48,0 | Device plug PG 9, type B, EN 175301-803 | 147.0 mm | 108,0 | 24 V DC |
| K- 07 25 11 96 | G 1/2 | 3300 | 70,0 | Device plug PG 9, type B, EN 175301-803 | 157.0 mm | 113,0 | 24 V DC |
| K- 07 25 11 97 | G 3/4 | 3800 | 70,0 | Device plug PG 9, type B, EN 175301-803 | 157.0 mm | 113,0 | 24 V DC |
| K- 07 25 11 98 | G 1 | 3800 | 124,0 | Device plug PG 9, type B, EN 175301-803 | 157.0 mm | 113,0 | 24 V DC |

Spare parts

| | |
|-------------------------|-----------------|
| K-MAGNETSPULE VARIOBLOC | Solenoid |
| K-GERAETESTECKER | Coupling socket |