

# K-VT VARIBLOC
Ball valves

## Properties

| | |
|---|---|
| **Outlets** | 4 (all sealed at delivery) |
| **Outlets for G 1/2 and G 3/4** | Top / bottom G 3/8 / G 1/2, Front / back G 1/4 |
| **Outlets for G 1/4 and G 3/8** | Top / bottom G 3/8, Front / back G 1/4 |
| **Flow rate measurement** | At P1 = 6 bar and pressure drop Δp = 1 bar |



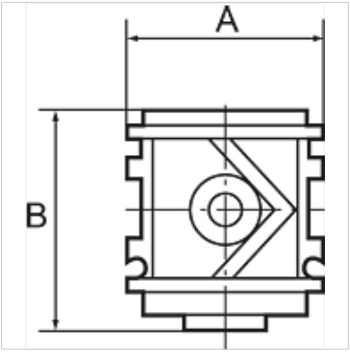


## Note

Further information on request

## Description

For removing unlubricated air when the manifold is flanged on upstream of the oil-mist lubricator. An integrated non-return valve prevents oil inflow from the oil-mist lubricator or the line.

## Item

| Identification | Thread | Flow rate (L/min) | A (mm) | B |
|---|---|---|---|---|
| **K- 07 25 11 99** | G 1/4 | 900 | 48,0 | 44.0 mm |
| **K- 07 25 12 00** | G 3/8 | 900 | 48,0 | 44.0 mm |
| **K- 07 25 12 01** | G 1/2 | 4000 | 70,0 | 56.0 mm |
| **K- 07 25 12 02** | G 3/4 | 5000 | 70,0 | 56.0 mm |
| **K- 07 25 12 03** | G 1 | 5000 | 124,0 | 56.0 mm |

*Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.*