


K-WTEH 2-TLG PC-BEHÄLTER VARIOBLOC

Service units, 2-piece with polycarbonate bowl

HANSA FLEX

Properties

| | |
|------------------------------------|---|
| Input pressure | Max. 16 bar (polycarbonate bowl), Max. 20 bar (metal bowl) |
| Media temperature | max. 50 °C |
| Ambient temperature | Max. 50 °C (polycarbonate bowl), Max. 80 °C (metal bowl) |
| Pore size in filter element | 40 µm |
| Sealant | NBR |
| Spring bonnet | POM |
| Housing | Die-cast zinc |
| Diaphragm | NBR |
| Dropper | PA |
| Drain valve | Manual |
| Flow rate measurement | At P1 = 10 bar, P2 = 6 bar and pressure drop $\Delta p = 1$ bar |

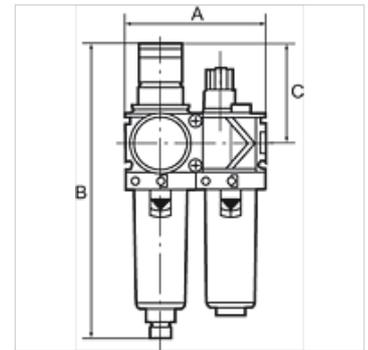

Note

Further information on request

Description

Two or three-piece service units consisting of a reversible diaphragm pressure regulator, independent of inlet pressure, with self-relieving design, combined with a centrifugal separator and a proportional lubricator. Approved series in modern industrial design, with the following key benefits: Simple handling, Convenient modular assembly thanks to innovative fasteners, Excellent flow values.

Ordering information

Service units are also available with bowl guard or metal bowl. Service units are also available in other control ranges (0.5 - 6 bar and 0.5 - 16 bar) and in lockable version. Please ask for more information.

Additional information

Service units are also available with bowl guard or metal bowl. Service units are also available in other control ranges.

Item

| Identification | Thread | Control range | Flow rate (L/min) | A (mm) | B | C (mm) |
|----------------|--------|---------------|-------------------|--------|----------|--------|
| K- 07 25 13 85 | G 1/4 | 0.5 - 10 bar | 1500 | 96,0 | 203,0 mm | 68,0 |
| K- 07 25 13 87 | G 3/8 | 0.5 - 10 bar | 1800 | 96,0 | 203,0 mm | 68,0 |
| K- 07 25 13 89 | G 1/2 | 0.5 - 10 bar | 3400 | 140,0 | 273,0 mm | 98,0 |
| K- 07 25 13 91 | G 3/4 | 0.5 - 10 bar | 5000 | 140,0 | 273,0 mm | 98,0 |
| K- 07 25 13 93 | G 1 | 0.5 - 10 bar | 5000 | 194,0 | 273,0 mm | 98,0 |

Spare parts

| | |
|---------------------------------|--|
| K-VERSCHLEI-SATZ VARIOBLOC | Set of wearing parts |
| K-FILTERELEMENT VARIOBLOC | Filter element |
| K-TROPFAUFSATZ VARIOBLOC | Drip attachment |
| K-ERSATZBEHÄLTER VARIOBLOC POLY | Spare tank Polycarbonat |
| K-ABLASSVENTIL AUTO | Fully-automatic drain valve with Adapter G 1/8 |
| K-TROPFAUFSATZ METALL | Drip attachment metal |