
# K-WMV 3/2 MANU DRUCKKNOPF

3/2-way miniature valves, manually operated, with pushbutton

## Properties

| | |
|---|---|
| **Operating principle** | NC |
| **Operating pressure** | 0.5 - 10 bar |
| **Operating temperature** | -10 °C to +60 °C |
| **Flow rate 6bar and 5bar** | 35 Nl/min |
| **nominal Ø** | 2,5 mm |
| **actuation pressure 6bar** | 8 N |
| **Valve body** | Aluminium |
| **Pressure button** | Nickel-plated brass |
| **Spring** | Stainless steel |
| **Sealant** | NBR |



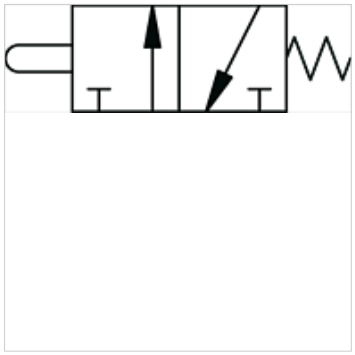

## Note

Further information on request

## Description

Monostable (non-latching) and bistable (latching) versions available.

## Item

| Identification | Connection | Operation | Washer |
|---|---|---|---|
| **K- 07 15 00 50** | 4 mm side | monostable | Black |
| **K- 07 15 00 51** | 4 mm side | monostable | Red |
| **K- 07 15 00 52** | M 5 side | monostable | Black |
| **K- 07 15 00 53** | M 5 side | monostable | Red |

*Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.*