


K-WMV 3/2 MANU DRUCKKNOPF

3/2-way miniature valves, manually operated, with pushbutton



| Properties | |
|-------------------------|---------------------|
| Operating principle | NC |
| Operating pressure | 0.5 - 10 bar |
| Operating temperature | -10 °C to +60 °C |
| Flow rate 6bar and 5bar | 35 NI/min |
| nominal Ø | 2,5 mm |
| actuation pressure 6bar | 8 N |
| Valve body | Aluminium |
| Pressure button | Nickel-plated brass |
| Spring | Stainless steel |
| Sealant | NBR |

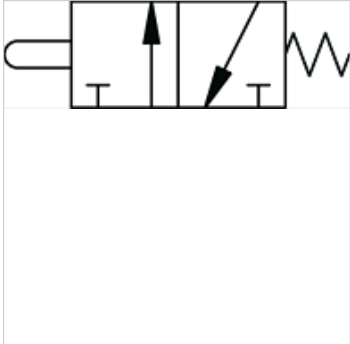

Note
Further information on request

Description
Monostable (non-latching) and bistable (latching) versions available.

| Item | | | |
|----------------|------------|------------|--------|
| Identification | Connection | Operation | Washer |
| K- 07 15 00 50 | 4 mm side | monostable | Black |
| K- 07 15 00 51 | 4 mm side | monostable | Red |
| K- 07 15 00 52 | M 5 side | monostable | Black |
| K- 07 15 00 53 | M 5 side | monostable | Red |