


K-WMV 3/2 MANU DREHKNOPF

3/2-way miniature valves, manually operated, with rotary knob (2 positions)

HANSA FLEX

Properties

| | |
|-------------------------|---------------------|
| Operating principle | NC |
| Operating pressure | 0.5 - 10 bar |
| Operating temperature | -10 °C to +60 °C |
| Flow rate 6bar and 5bar | 35 NI/min |
| nominal Ø | 2,5 mm |
| actuation pressure 6bar | 8 N |
| Valve body | Aluminium |
| Pressure button | Nickel-plated brass |
| Spring | Stainless steel |
| Sealant | NBR |

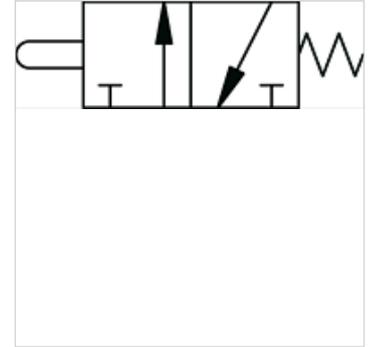

Note

Further information on request

Description

Monostable (non-latching) and bistable (latching) versions available.

Item

| Identification | Connection | Operation |
|----------------|------------|------------|
| K- 07 15 00 54 | 4 mm side | monostable |
| K- 07 15 00 55 | M 5 side | monostable |
| K- 07 15 00 56 | 4 mm side | bistable |
| K- 07 15 00 57 | M 5 side | bistable |