


# K-WMV 3/2 MANU DREHHEBEL

3/2-way miniature valves, manually operated, with wing lever (2 positions)



| Properties              |                     |
|-------------------------|---------------------|
| Operating principle     | NC                  |
| Operating pressure      | 0.5 - 10 bar        |
| Operating temperature   | -10 °C to +60 °C    |
| Flow rate 6bar and 5bar | 35 NI/min           |
| nominal Ø               | 2,5 mm              |
| actuation pressure 6bar | 8 N                 |
| Valve body              | Aluminium           |
| Pressure button         | Nickel-plated brass |
| Spring                  | Stainless steel     |
| Sealant                 | NBR                 |

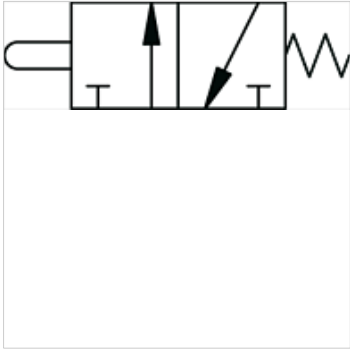

## Note

Further information on request

## Description

Monostable (non-latching) and bistable (latching) versions available.

| Item           |            |            |
|----------------|------------|------------|
| Identification | Connection | Operation  |
| K- 07 15 00 58 | 4 mm side  | monostable |
| K- 07 15 00 59 | M 5 side   | monostable |
| K- 07 15 00 60 | 4 mm side  | bistable   |
| K- 07 15 00 61 | M 5 side   | bistable   |