K-WMV 3/2 STOESSEL


3/2-way miniature valves, with plunger

HANSA FLEX

Properties

Operating pressure	0.5 - 10 bar
Operating temperature	-10 °C to +60 °C
Flow rate 6bar and 5bar	35 Nl/min
nominal Ø	2,5 mm
actuation pressure 6bar	8 N
Valve body	Aluminium
Pressure button	Nickel-plated brass
Spring	Stainless steel
Sealant	NBR



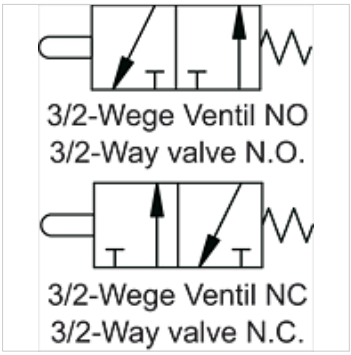

Note

Further information on request

Description

Miniature valves, 3/2-way type, NC or NO.

Item

Identification	Connection	Function
K- 07 15 00 88	4 mm side	NO
K- 07 15 00 89	M 5 side	NO
K- 07 15 00 90	4 mm side	NC
K- 07 15 00 91	M 5 side	NC

Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.