


# K-WMV 3/2 STOESSEL

3/2-way miniature valves, with plunger

## Properties

|                         |                     |
|-------------------------|---------------------|
| Operating pressure      | 0.5 - 10 bar        |
| Operating temperature   | -10 °C to +60 °C    |
| Flow rate 6bar and 5bar | 35 NI/min           |
| nominal Ø               | 2,5 mm              |
| actuation pressure 6bar | 8 N                 |
| Valve body              | Aluminium           |
| Pressure button         | Nickel-plated brass |
| Spring                  | Stainless steel     |
| Sealant                 | NBR                 |

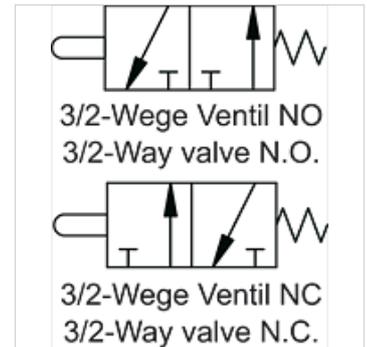

## Note

Further information on request

## Description

Miniature valves, 3/2-way type, NC or NO.

| Item           |            |          |
|----------------|------------|----------|
| Identification | Connection | Function |
| K- 07 15 00 88 | 4 mm side  | NO       |
| K- 07 15 00 89 | M 5 side   | NO       |
| K- 07 15 00 90 | 4 mm side  | NC       |
| K- 07 15 00 91 | M 5 side   | NC       |