


K-DRV ABLD STECK C SCHLITZ

Unidirectional flow control valves, outgoing air restriction (»C«), plug-in connector

HANSA*FLEX*

Properties

| | |
|---|------------------------------------|
| Operating pressure | Max. 10 bar |
| Temp. range | 0 °C to +70 °C |
| Hollow screw, pivot arm, regulating screw | Nickel-plated brass |
| Internal parts | Brass with a bare metal surface |
| lip seal O-ring | NBR |
| Seals (non-detachable) | Polyamide (glass fibre-reinforced) |

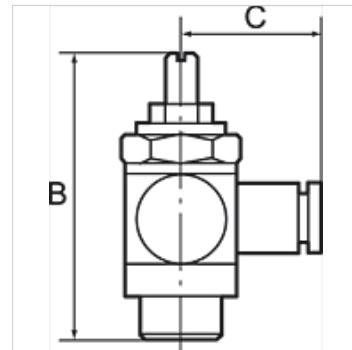

Note

Further information on request

Description

For fine regulation of a cylinder piston speed and precise control of flow rates. Designed as a banjo-type valve with a hollow bolt and ring piece. Can be screwed directly onto the valve or cylinder. Compact type of construction, also ideal where space is restricted.

Item

| Identification | C (mm) | for hose | Thread | AF | B (mm) |
|----------------|-----------|----------|--------|-------|-----------|
| K-07 15 04 74 | 18,6 | 4 mm | M 5 | 8 mm | 24,5 |
| K-07 15 04 75 | 21,7 | 6 mm | M 5 | 8 mm | 24,5 |
| K-07 15 04 79 | 20,6 | 4 mm | G 1/8 | 14 mm | 32,0 |
| K-07 15 04 80 | 22,7 | 6 mm | G 1/8 | 14 mm | 32,0 |
| K-07 15 04 81 | 23,7 | 8 mm | G 1/8 | 14 mm | 32,0 |
| K-07 15 04 77 | 24,2 | 6 mm | G 1/4 | 17 mm | 40,0 |
| K-07 15 04 78 | 24,7 | 8 mm | G 1/4 | 17 mm | 40,0 |
| K-07 15 04 76 | 26,8 | 10 mm | G 1/4 | 17 mm | 40,0 |
| K-07 15 04 82 | 28,8 | 10 mm | G 3/8 | 20 mm | 50,0 |