


# K-DRV ABLD STECK C SCHLITZ

Unidirectional flow control valves, outgoing air restriction (»C«), plug-in connector

**HANSA FLEX**

## Properties

Operating pressure	Max. 10 bar
Temp. range	0 °C to +70 °C
Hollow screw, pivot arm, regulating screw	Nickel-plated brass
Internal parts	Brass with a bare metal surface
lip seal O-ring	NBR
Seals (non-detachable)	Polyamide (glass fibre-reinforced)

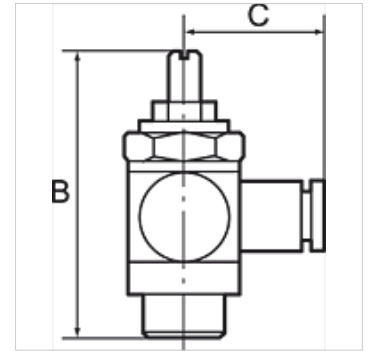

## Note

Further information on request

## Description

For fine regulation of a cylinder piston speed and precise control of flow rates. Designed as a banjo-type valve with a hollow bolt and ring piece. Can be screwed directly onto the valve or cylinder. Compact type of construction, also ideal where space is restricted.

## Item

Identification	C (mm)	for hose	Thread	AF	B (mm)
K- 07 15 04 74	18,6	4 mm	M 5	8 mm	24,5
K- 07 15 04 75	21,7	6 mm	M 5	8 mm	24,5
K- 07 15 04 79	20,6	4 mm	G 1/8	14 mm	32,0
K- 07 15 04 80	22,7	6 mm	G 1/8	14 mm	32,0
K- 07 15 04 81	23,7	8 mm	G 1/8	14 mm	32,0
K- 07 15 04 77	24,2	6 mm	G 1/4	17 mm	40,0
K- 07 15 04 78	24,7	8 mm	G 1/4	17 mm	40,0
K- 07 15 04 76	26,8	10 mm	G 1/4	17 mm	40,0
K- 07 15 04 82	28,8	10 mm	G 3/8	20 mm	50,0