


K-DV STECK B SCHLITZ

Bidirectional flow control valves, air restriction at both ends (»B«),
plug-in connector

HANSA FLEX

Properties

| | |
|---|------------------------------------|
| Operating pressure | Max. 10 bar |
| Temp. range | 0 °C to +70 °C |
| Hollow screw, pivot arm, regulating screw | Nickel-plated brass |
| Internal parts | Brass with a bare metal surface |
| lip seal O-ring | NBR |
| Seals (non-detachable) | Polyamide (glass fibre-reinforced) |

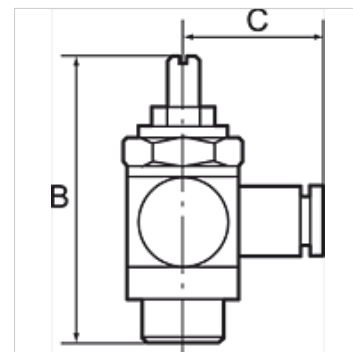

Note

Further information on request

Description

For regulation of a cylinder piston speed at both ends and control of flow rates. Designed as a banjo-type valve with a hollow bolt and ring piece for mounting directly. Compact type of construction, also ideal where space is restricted.

Item

| Identification | C (mm) | for hose | Thread | AF | B (mm) |
|----------------|-----------|----------|--------|-------|-----------|
| K- 07 15 05 01 | 18,6 | 4 mm | M 5 | 8 mm | 24,5 |
| K- 07 15 05 02 | 21,7 | 6 mm | M 5 | 8 mm | 24,5 |
| K- 07 15 05 06 | 20,6 | 4 mm | G 1/8 | 14 mm | 32,0 |
| K- 07 15 05 07 | 22,7 | 6 mm | G 1/8 | 14 mm | 32,0 |
| K- 07 15 05 08 | 23,7 | 8 mm | G 1/8 | 14 mm | 32,0 |
| K- 07 15 05 04 | 24,2 | 6 mm | G 1/4 | 17 mm | 40,0 |
| K- 07 15 05 05 | 24,7 | 8 mm | G 1/4 | 17 mm | 40,0 |
| K- 07 15 05 03 | 26,8 | 10 mm | G 1/4 | 17 mm | 40,0 |
| K- 07 15 05 09 | 28,8 | 10 mm | G 3/8 | 20 mm | 50,0 |