



K-WFV 5/2 RASTEND FUS

5/2-way foot-operated valves (bistable, latching, with foot guard)

HANSA FLEX

Properties

| | |
|----------------------------------|---|
| Operating pressure | 2.5 - 10 bar |
| Temp. range | -10 °C to +60 °C |
| Flow rate at 6,3 bar and 0,5 bar | 60 NI/min (4 mm and M5), 640 NI/min (G 1/4) |
| Flow rate at 6,3 bar and 1 bar | 95 NI/min (4 mm and M5), 840 NI/min (G 1/4) |

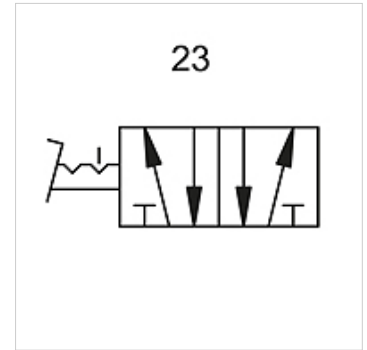

Note

Further information on request

Description

Foot-operated valves, 3/2- and 5/2-way types, bistable or monostable (non-latching).

Item

| Identification | Connection | circuit diagram number |
|----------------|------------|------------------------|
| K- 07 15 01 92 | G 1/4 | 23 |