


# K-HS RD

Unidirectional banjo valves, pneumatic release, port 2 with female thread

**HANSA FLEX**

## Properties

<b>Working pressure</b>	0.3 - 10 bar
<b>Pilot pressure</b>	0.5 - 2.5 bar, depending on operating pressure
<b>Media temperature</b>	max. 60 °C
<b>Installation position</b>	Any. The ring piece must be positioned before the valve is tightened
<b>Material</b>	Nickel-plated brass
<b>Sealant</b>	Perbunan

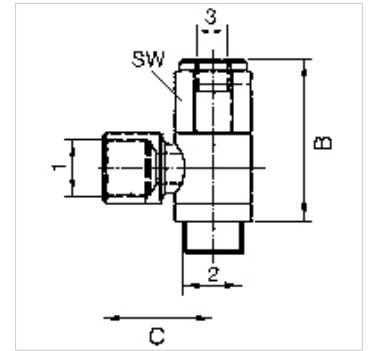

## Note

Further information on request

## Description

For stopping and positioning the cylinder movement: If a control signal is present at port 3 (see drawing), air can flow to and from the cylinder. If no control signal is present, the cylinder exhaust air is shut off by the unidirectional valve. The cylinder is stopped. Releasable unidirectional valves are screwed directly onto the cylinder instead of the normal pipe connections.

Item					
Identification	Port 1	Port 2	Connection 3	B (mm)	C (mm)
K- 07 15 07 04	G 1/8	G 1/8	M 5	38,0	21,5
K- 07 15 07 03	G 1/4	G 1/4	G 1/8	43,0	25,4
K- 07 15 07 05	G 3/8	G 3/8	G 1/8	46,0	31,6
K- 07 15 07 02	G 1/2	G 1/2	G 1/8	52,0	32,0