



# K-DUFR B SCHL SCHL

Flow regulators, flow at both ends, pipe - pipe

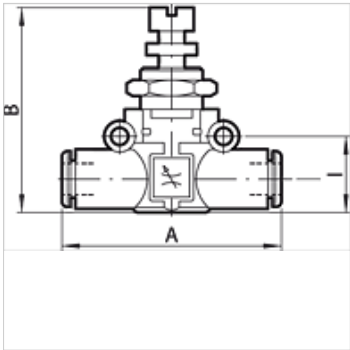

Properties	
Operating pressure	Max. 10 bar
Flow rate 6,3bar	155 l/min (Ø 4), 450 l/min (Ø 6), 850 l/min (Ø 8)
Flow rate of the vent 6.3 bar	160 l/min (Ø 4), 550 l/min (Ø 6), 950 l/min (Ø 8)
Adjustment	Manual or screwdriver
Temp. range	-20 °C to +60 °C
Body	Technopolymer
Internal parts	nickel-plated brass, brass, \ntechnopolymer, stainless steel
Sealant	NBR
Installation	Wall mounting (housing with drilled holes) Bracket mounting (mounting bracket available) Panel mounting (with bracket or lock nut)
Symbol	on the housing



**Note**  
Further information on request

**Description**  
A carefully selected assortment of products for installation in pneumatic circuits. These small, highly efficient components allow all pneumatic functions to be implemented anywhere in the circuit. The series has an ultramodular design. <br>All components can be installed In parallel, In series, In a mixed parallel / serial configuration. Available as Pipe / pipe connection with two plug connectors Thread / pipe connection, with one plug connector and one nickel-plated brass thread.

Item				
Identification	for hose Ø (mm)	A (mm)	B (mm)	l (mm)
K- 07 15 05 99	4	42,0	35,0	12,7
K- 07 15 06 00	6	49,4	40,0	14,6
K- 07 15 06 01	8	57,3	49,0	18,7