



# K-SNV ENTLUE V SCHL GEW

Quick-exhaust valves, conveyed exhaust, pipe (input) - thread (output)

**HANSA FLEX**

## Properties

<b>Operating pressure</b>	1 - 10 bar
<b>Flow rate 6,3bar</b>	50 NI/min (Ø 4), 270 NI/min (Ø 6), 400 NI/min (Ø 8)
<b>Flow rate of the vent 6.3 bar</b>	100 NI/min (Ø 4), 700 NI/min (Ø 6), 1000 NI/min (Ø 8)
<b>Temp. range</b>	-20 °C to +60 °C
<b>Body</b>	Technopolymer
<b>Internal parts</b>	nickel-plated brass, brass, \ntechnopolymer, stainless steel
<b>Sealant</b>	NBR
<b>Installation</b>	Wall mounting (housing with drilled holes) Bracket mounting (mounting bracket available) Panel mounting (with bracket or lock nut)
<b>Symbol</b>	on the housing

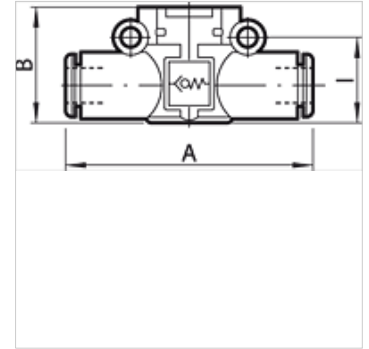

## Note

Further information on request

## Description

A carefully selected assortment of products for installation in pneumatic circuits. These small, highly efficient components allow all pneumatic functions to be implemented anywhere in the circuit. The series has an ultramodular design. <br>All components can be installed In parallel, In series, In a mixed parallel / serial configuration. Available as Pipe / pipe connection with two plug connectors Thread / pipe connection, with one plug connector and one nickel-plated brass thread.

## Item

Identification	Thread	for hose Ø (mm)	A (mm)	B (mm)	l (mm)
K- 07 15 20 36	G 1/8	6	58,5	30,2	14,6
K- 07 15 20 37	G 1/8	8	66,2	35,9	18,7
K- 07 15 20 34	G 1/4	6	61,5	30,2	14,6
K- 07 15 20 35	G 1/4	8	70,6	35,9	18,7
K- 07 15 20 38	G 3/8	8	72,2	35,9	18,7