


K-SNV ENTLUE V SCHA SCHL GEW

Quick-exhaust valves, with silencer, pipe (input) - thread (output)

HANSA FLEX

Properties

Operating pressure	1 - 10 bar
Flow rate 6,3bar	50 NI/min (Ø 4), 270 NI/min (Ø 6), 400 NI/min (Ø 8)
Flow rate of the vent 6.3 bar	100 NI/min (Ø 4), 700 NI/min (Ø 6), 1000 NI/min (Ø 8)
Temp. range	-20 °C to +60 °C
Body	Technopolymer
Internal parts	nickel-plated brass, brass, \ntechnopolymer, stainless steel
Sealant	NBR
Installation	Wall mounting (housing with drilled holes) Bracket mounting (mounting bracket available) Panel mounting (with bracket or lock nut)
Symbol	on the housing

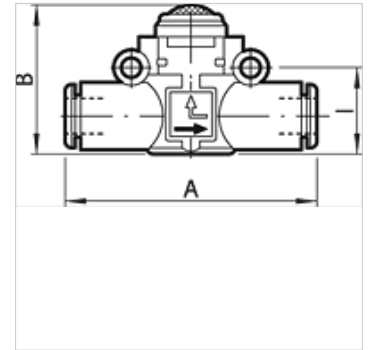

Note

Further information on request

Description

A carefully selected assortment of products for installation in pneumatic circuits. These small, highly efficient components allow all pneumatic functions to be implemented anywhere in the circuit. The series has an ultramodular design.
All components can be installed In parallel, In series, In a mixed parallel / serial configuration. Available as Pipe / pipe connection with two plug connectors Thread / pipe connection, with one plug connector and one nickel-plated brass thread.

Item

Identification	Thread	for hose Ø (mm)	A (mm)	B (mm)	l (mm)
K- 07 15 25 31	M 5	4	46,7	19,8	12,8
K- 07 15 25 32	G 1/8	4	50,6	19,8	12,8
K- 07 15 20 41	G 1/8	6	58,5	25,5	14,6
K- 07 15 20 42	G 1/8	8	66,2	31,5	18,7
K- 07 15 20 39	G 1/4	6	61,5	25,5	14,6
K- 07 15 20 40	G 1/4	8	70,6	31,5	18,7
K- 07 15 20 43	G 3/8	8	72,2	31,5	18,7