K-KURZH ZYL DOPPELW ACP


Short-stroke cylinders, double acting (magnetic, non-cushioned)

HANSA-FLEX

Properties

Media	Filtered compressed air, lubricated (ensure continuity) or unlubricated
Operating pressure	Max. 10 bar
Set pressure	0,6 bar (Ø 12 bis Ø 32), 0,4 bar (Ø 40 bis Ø 80)
Temp. range	-10 °C to +80 °C
Piston rod	C45 steel, hard chrome-plated
Pipe	Aluminium alloy, anodised
head diameter	Ø 12 to Ø 25 painted brass, Ø 32 to Ø 80 aluminium
Piston	Ø 12 to Ø 63 synthetic (acetal) resin, Ø 80 alu/ PTFE
Piston rod seal	NBR (additional charge for PU and FKM)
Piston seal	NBR (additional charge for PU and FKM)



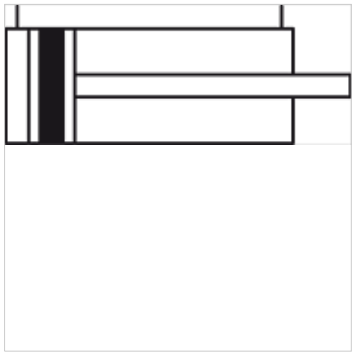

Note

Further information on request

Description

Suitable for installation in limited spaces, with magnet.

Additional information

Important: The scope of supply does not include a connector. Please order separately.

Other types, e.g. increased thermal stability, non-standard strokes, through rod, non-rotating version, etc., available on request.

Item

Identification	Ø piston	Stroke (mm)	Connection	thread internal piston rod
K- 07 15 11 31	12 mm	5	M 5	M 3
K- 07 15 11 32	12 mm	10	M 5	M 3
K- 07 15 11 33	12 mm	25	M 5	M 3
K- 07 15 11 34	12 mm	30	M 5	M 3
K- 07 15 11 35	12 mm	40	M 5	M 3
K- 07 15 11 36	16 mm	5	M 5	M 5
K- 07 15 11 37	16 mm	10	M 5	M 5
K- 07 15 11 38	16 mm	25	M 5	M 5
K- 07 15 11 39	16 mm	30	M 5	M 5
K- 07 15 11 40	16 mm	40	M 5	M 5
K- 07 15 11 41	20 mm	5	M 5	M 5
K- 07 15 11 42	20 mm	10	M 5	M 5
K- 07 15 11 43	20 mm	25	M 5	M 5
K- 07 15 11 44	20 mm	30	M 5	M 5
K- 07 15 11 45	20 mm	40	M 5	M 5
K- 07 15 11 46	20 mm	50	M 5	M 5
K- 07 15 11 47	25 mm	5	G 1/8	M 5
K- 07 15 11 48	25 mm	10	G 1/8	M 5
K- 07 15 11 49	25 mm	25	G 1/8	M 5
K- 07 15 11 50	25 mm	30	G 1/8	M 5
K- 07 15 11 51	25 mm	40	G 1/8	M 5
K- 07 15 11 52	25 mm	50	G 1/8	M 5
K- 07 15 11 53	32 mm	5	G 1/8	M 6
K- 07 15 11 54	32 mm	10	G 1/8	M 6
K- 07 15 11 55	32 mm	25	G 1/8	M 6
K- 07 15 11 56	32 mm	30	G 1/8	M 6
K- 07 15 11 57	32 mm	40	G 1/8	M 6
K- 07 15 11 58	32 mm	50	G 1/8	M 6
K- 07 15 11 59	40 mm	5	G 1/8	M 6
K- 07 15 11 60	40 mm	10	G 1/8	M 6
K- 07 15 11 61	40 mm	25	G 1/8	M 6
K- 07 15 11 62	40 mm	30	G 1/8	M 6
K- 07 15 11 63	40 mm	40	G 1/8	M 6

Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.

K-KURZH ZYL DOPPELW ACP

Short-stroke cylinders, double acting (magnetic, non-cushioned)

HANSA-FLEX

Item

Identification	Ø piston	Stroke (mm)	Connection	thread internal piston rod
K- 07 15 11 64	40 mm	50	G 1/8	M 6
K- 07 15 11 65	50 mm	5	G 1/8	M 8
K- 07 15 11 66	50 mm	10	G 1/8	M 8
K- 07 15 11 67	50 mm	25	G 1/8	M 8
K- 07 15 11 68	50 mm	30	G 1/8	M 8
K- 07 15 11 69	50 mm	40	G 1/8	M 8
K- 07 15 11 70	50 mm	50	G 1/8	M 8
K- 07 15 11 71	50 mm	70	G 1/8	M 8
K- 07 15 11 72	63 mm	5	G 1/8	M 8
K- 07 15 11 73	63 mm	10	G 1/8	M 8
K- 07 15 11 74	63 mm	25	G 1/8	M 8
K- 07 15 11 75	63 mm	30	G 1/8	M 8
K- 07 15 11 76	63 mm	40	G 1/8	M 8
K- 07 15 11 77	63 mm	50	G 1/8	M 8
K- 07 15 11 78	63 mm	70	G 1/8	M 8
K- 07 15 11 79	80 mm	5	G 1/4	M 10
K- 07 15 11 80	80 mm	10	G 1/4	M 10
K- 07 15 11 81	80 mm	25	G 1/4	M 10
K- 07 15 11 82	80 mm	30	G 1/4	M 10
K- 07 15 11 83	80 mm	40	G 1/4	M 10
K- 07 15 11 84	80 mm	50	G 1/4	M 10
K- 07 15 11 85	80 mm	70	G 1/4	M 10
K- 07 15 11 86	80 mm	100	G 1/4	M 10

Accessories

K-MAGNETSENSOREN-REED	Reed magnetic sensor (incl. 2.5 m cable)

Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.