K-RUNDZYLINDER DOPP O D 1


Round cylinders, double acting (magnetic, non-cushioned)

HANSA-FLEX

Properties

Media	Filtered (50 µm), unlubricated or lubricated compressed air. If lubrication is used, it must be continuous.
Working pressure	Max. 10 bar
Set pressure	0,4 bar (Ø 32 und Ø 40), 0,3 bar (Ø 50)
Temp. range	-10 °C to +80 °C
Design	Screwed joint between stainless steel barrel and heads
Piston rod	C45 steel, hard chrome-plated
Pipe	Anodised aluminium
Piston	Technopolymer
Sealant	NBR



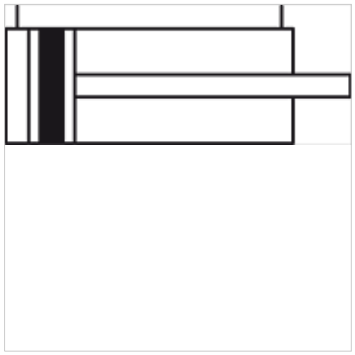

Note

Further information on request

Description

Version with magnetic piston

Ordering information

Note: 500 mm is the maximum stroke available for the double-acting type.

Additional information

Important: The scope of supply does not include a connector. Please order separately.

Note: 500 mm is the maximum stroke available for the double-acting type.

Item

Identification	Ø piston	Stroke (mm)	Connection	Thread piston rod
K- 07 15 17 29	32 mm	25	G 1/8	M 10 x 1.25
K- 07 15 17 30	32 mm	50	G 1/8	M 10 x 1.25
K- 07 15 17 31	32 mm	80	G 1/8	M 10 x 1.25
K- 07 15 17 32	32 mm	100	G 1/8	M 10 x 1.25
K- 07 15 17 33	32 mm	125	G 1/8	M 10 x 1.25
K- 07 15 17 34	32 mm	160	G 1/8	M 10 x 1.25
K- 07 15 17 35	32 mm	200	G 1/8	M 10 x 1.25
K- 07 15 17 36	32 mm	250	G 1/8	M 10 x 1.25
K- 07 15 17 37	32 mm	320	G 1/8	M 10 x 1.25
K- 07 15 17 38	32 mm	400	G 1/8	M 10 x 1.25
K- 07 15 17 39	32 mm	500	G 1/8	M 10 x 1.25
K- 07 15 17 40	40 mm	25	G 1/4	M 12 x 1.25
K- 07 15 17 41	40 mm	50	G 1/4	M 12 x 1.25
K- 07 15 17 42	40 mm	80	G 1/4	M 12 x 1.25
K- 07 15 17 43	40 mm	100	G 1/4	M 12 x 1.25
K- 07 15 17 44	40 mm	125	G 1/4	M 12 x 1.25
K- 07 15 17 45	40 mm	160	G 1/4	M 12 x 1.25
K- 07 15 17 46	40 mm	200	G 1/4	M 12 x 1.25
K- 07 15 17 47	40 mm	250	G 1/4	M 12 x 1.25
K- 07 15 17 48	40 mm	320	G 1/4	M 12 x 1.25
K- 07 15 17 49	40 mm	400	G 1/4	M 12 x 1.25
K- 07 15 17 50	40 mm	500	G 1/4	M 12 x 1.25
K- 07 15 17 51	50 mm	25	G 1/4	M 16 x 1.5
K- 07 15 17 52	50 mm	50	G 1/4	M 16 x 1.5
K- 07 15 17 53	50 mm	80	G 1/4	M 16 x 1.5
K- 07 15 17 54	50 mm	100	G 1/4	M 16 x 1.5
K- 07 15 17 55	50 mm	125	G 1/4	M 16 x 1.5
K- 07 15 17 56	50 mm	160	G 1/4	M 16 x 1.5
K- 07 15 17 57	50 mm	200	G 1/4	M 16 x 1.5
K- 07 15 17 58	50 mm	250	G 1/4	M 16 x 1.5

Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.

K-RUNDZYLINDER DOPP O D 1

Round cylinders, double acting (magnetic, non-cushioned)

HANSA-FLEX

Item

Identification	Ø piston	Stroke (mm)	Connection	Thread piston rod
K- 07 15 17 59	50 mm	320	G 1/4	M 16 x 1.5
K- 07 15 17 60	50 mm	400	G 1/4	M 16 x 1.5
K- 07 15 17 61	50 mm	500	G 1/4	M 16 x 1.5

Accessories

K-FUSSBEFESTIGUNG 2	Foot model
K-KOPFMUTTER DECKEL BODEN	Hexagon nut (for head)
K-GABELKOEPFE 4	Fork model
K-GELENKAUGEN 5	Rod eye model
K-SCHWENKLAGER 2	Counter-hinge model
K-SENSORHALTER	Sensor support (with T-slot adapter)
K-SENSOREN T-NUT 1	Sensor for T-slot

Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.