


# K-RUNDZYLINDER DOPP O D 1

## Round cylinders, double acting (magnetic, non-cushioned)



### Properties

<b>Media</b>	Filtered (50 µm), unlubricated or lubricated compressed air. If lubrication is used, it must be continuous.
<b>Working pressure</b>	Max. 10 bar
<b>Set pressure</b>	0,4 bar (Ø 32 und Ø 40), 0,3 bar (Ø 50)
<b>Temp. range</b>	-10 °C to +80 °C
<b>Design</b>	Screwed joint between stainless steel barrel and heads
<b>Piston rod</b>	C45 steel, hard chrome-plated
<b>Pipe</b>	Anodised aluminium
<b>Piston</b>	Technopolymer
<b>Sealant</b>	NBR

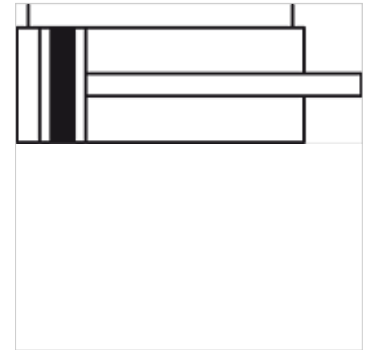

### Note

Further information on request

### Description

Version with magnetic piston

### Ordering information

Note: 500 mm is the maximum stroke available for the double-acting type.

### Additional information

Important: The scope of supply does not include a connector. Please order separately.

Note: 500 mm is the maximum stroke available for the double-acting type.

Item	Identification	Ø piston	Stroke (mm)	Connection	Thread piston rod
K- 07 15 17 29		32 mm	25	G 1/8	M 10 x 1.25
K- 07 15 17 30		32 mm	50	G 1/8	M 10 x 1.25
K- 07 15 17 31		32 mm	80	G 1/8	M 10 x 1.25
K- 07 15 17 32		32 mm	100	G 1/8	M 10 x 1.25
K- 07 15 17 33		32 mm	125	G 1/8	M 10 x 1.25
K- 07 15 17 34		32 mm	160	G 1/8	M 10 x 1.25
K- 07 15 17 35		32 mm	200	G 1/8	M 10 x 1.25
K- 07 15 17 36		32 mm	250	G 1/8	M 10 x 1.25
K- 07 15 17 37		32 mm	320	G 1/8	M 10 x 1.25
K- 07 15 17 38		32 mm	400	G 1/8	M 10 x 1.25
K- 07 15 17 39		32 mm	500	G 1/8	M 10 x 1.25
K- 07 15 17 40		40 mm	25	G 1/4	M 12 x 1.25
K- 07 15 17 41		40 mm	50	G 1/4	M 12 x 1.25
K- 07 15 17 42		40 mm	80	G 1/4	M 12 x 1.25
K- 07 15 17 43		40 mm	100	G 1/4	M 12 x 1.25
K- 07 15 17 44		40 mm	125	G 1/4	M 12 x 1.25
K- 07 15 17 45		40 mm	160	G 1/4	M 12 x 1.25
K- 07 15 17 46		40 mm	200	G 1/4	M 12 x 1.25
K- 07 15 17 47		40 mm	250	G 1/4	M 12 x 1.25
K- 07 15 17 48		40 mm	320	G 1/4	M 12 x 1.25
K- 07 15 17 49		40 mm	400	G 1/4	M 12 x 1.25
K- 07 15 17 50		40 mm	500	G 1/4	M 12 x 1.25
K- 07 15 17 51		50 mm	25	G 1/4	M 16 x 1.5
K- 07 15 17 52		50 mm	50	G 1/4	M 16 x 1.5
K- 07 15 17 53		50 mm	80	G 1/4	M 16 x 1.5
K- 07 15 17 54		50 mm	100	G 1/4	M 16 x 1.5
K- 07 15 17 55		50 mm	125	G 1/4	M 16 x 1.5
K- 07 15 17 56		50 mm	160	G 1/4	M 16 x 1.5
K- 07 15 17 57		50 mm	200	G 1/4	M 16 x 1.5
K- 07 15 17 58		50 mm	250	G 1/4	M 16 x 1.5



# K-RUNDZYLINDER DOPP O D 1

Round cylinders, double acting (magnetic, non-cushioned)

Item				
Identification	Ø piston	Stroke (mm)	Connection	Thread piston rod
K- 07 15 17 59	50 mm	320	G 1/4	M 16 x 1.5
K- 07 15 17 60	50 mm	400	G 1/4	M 16 x 1.5
K- 07 15 17 61	50 mm	500	G 1/4	M 16 x 1.5

Accessories	
K-FUSSBEFESTIGUNG 2	Foot model
K-KOPFMUTTER DECKEL BODEN	Hexagon nut (for head)
K-GABELKOEPF 4	Fork model
K-GELENKAUGEN 5	Rod eye model
K-SCHWENKLAGER 2	Counter-hinge model
K-SENSORHALTER	Sensor support (with T-slot adapter)
K-SENSOREN T-NUT 1	Sensor for T-slot