
K-SCHNELLENTLUEFTUNGV

Quick-exhaust valves

Properties

min. working pressure	0,5 bar
Operating pressure	max. 12 bar
Operating temperature	Max. 80 °C
Thread description	G thread acc. DIN EN ISO 228-1
Housing	Nickel-plated brass
Diaphragm	Polyurethane



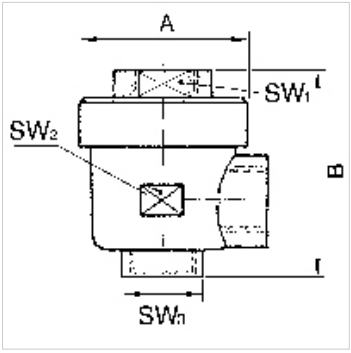

Note

Further information on request

Item

Identification	Thread	A (mm)	B (mm)	AF1 (mm)	AF2 (mm)	AF3 (mm)
K- 07 30 25 18	G 1/8	28,0	42,0	14	14	14
K- 07 30 25 17	G 1/4	33,0	53,0	19	19	19
K- 07 30 25 16	G 1/2	43,0	71,0	26	26	26

Spare parts

K-ERSATZ DICHT	Replacement diaphragm, seal

Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.