


# K-BKR MINI BLAUER GR

Mini ball valves with blue wing lever surface

## Properties

<b>Operating pressure</b>	Max. 10 bar
<b>Thread description</b>	Female thread G (DIN EN ISO 228-1), Male thread R (ISO 7-1)
<b>Media temperature</b>	-10 °C to +80 °C
<b>Turning handle</b>	Plastic
<b>Housing and ball</b>	Nickel-plated brass
<b>Ball seals</b>	PTFE
<b>Stem seal</b>	NBR

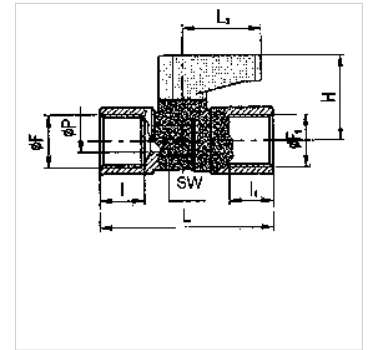

## Note

Further information on request

## Item

Identification	DN	Thread	H (mm)	L (mm)	L1 (mm)	AF (mm)
K- 07 30 20 06	6	G 1/8 female	23,0	34,0	24,0	15
K- 07 30 20 07	6	G 1/4 female	23,0	38,0	24,0	15
K- 07 30 20 08	8	G 3/8 female	24,0	43,0	24,0	17
K- 07 30 20 09	10	G 1/2 female	27,0	49,0	24,0	21
K- 07 30 20 02	6	G 1/8 female / R 1/8 male	23,0	34,0	24,0	15
K- 07 30 20 03	6	G 1/4 female / R 1/4 male	23,0	39,0	24,0	15
K- 07 30 20 04	8	G 3/8 female / R 3/8 male	24,0	43,0	24,0	17
K- 07 30 20 05	10	G 1/2 female / R 1/2 male	27,0	50,0	24,0	21