K-VORFILTER PC-BEHAEL SCHUTZ MUTIFI


Pre-filters with polycarbonate bowl and bowl guard

HANSA FLEX

Properties

Input pressure	Max. 16 bar
Media temperature	max. 60 °C
Ambient temperature	Max. 60 °C
Filter rating	0,30 µm
Efficiency	99.999 %
Sealant	NBR
Filter insert	Paper-POM
Housing	Die-cast zinc
Drain valve	Semi-automatic
Flow rate measurement	FV at P1 = 6 bar and Δp = 0.02 bar



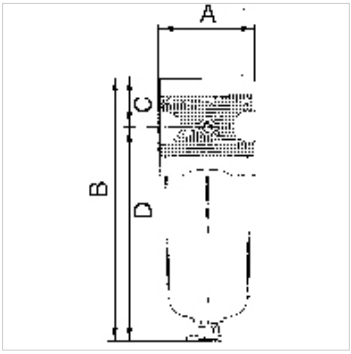

Note

* = Dimensions with adapter plate!
Further information on request

Description

Micro-filters for compliance with strict compressed air purity requirements. Suitable for all applications where standard filters do not afford the desired efficiency.

Additional information

on Art. K-07250721: Max. inlet pressure 300 bar. Other cylinder pressure regulators available on request.

Item

Identification	Thread	Flow rate (L/min)	A (mm)	B	C (mm)	D (mm)	DN
K- 07 25 10 70	G 1/4	160	47,8	152.1 mm	27,0	125,1	6
K- 07 25 10 73	G 1/2	500	68,8	180.8 mm (185.8 mm)*	72,0	147,3	15

Spare parts

K-HALTERBAUSATZ MULTIFIX	Holder
K-KOPPELPAKET MEHR	Coupling packet
K-KOPPELPAKET SCHMA	Coupling packet
K-AUTOMAT ABLASSVENTIL	Automatic drain valve
K-PC-BEHAELTER FILTER MULTIFIX	Polycarbonate tank filter
K-METALLBEHAELTER OELER MULTIFIX	Metal tank oiler

Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.