# K-FI MIKRO PC-BEHAEL SCHU MULTIFIX


Micro-filters with polycarbonate bowl and bowl guard

HANSA FLEX

## Properties

| | |
|---|---|
| **Input pressure** | Max. 16 bar |
| **Media temperature** | max. 60 °C |
| **Ambient temperature** | Max. 60 °C |
| **Filter rating** | 0,01 µm |
| **Efficiency** | 99.999 % |
| **Sealant** | NBR |
| **Filter insert** | Borosilicate-POM |
| **Housing** | Die-cast zinc |
| **Drain valve** | Semi-automatic |
| **Flow rate measurement** | FM at P1 = 6 bar and Δp = 0.09 bar |



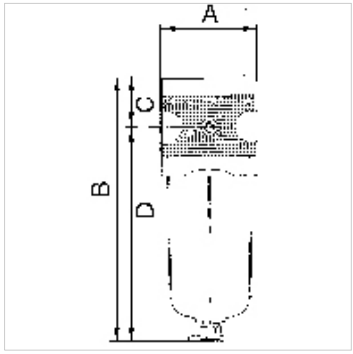


## Note

* = Dimensions with adapter plate!
Further information on request

## Description

Micro-filters for compliance with strict compressed air purity requirements. Suitable for all applications where standard filters do not afford the desired efficiency.

## Additional information

on Art. K-07250721: Max. inlet pressure 300 bar. Other cylinder pressure regulators available on request.

## Item

| Identification | Thread | Flow rate (L/min) | A (mm) | B | C (mm) | D (mm) | DN | Size |
|---|---|---|---|---|---|---|---|---|
| **K- 07 25 10 60** | G 1/4 | 280 | 47,8 | 152.1 mm | 27,0 | 125,1 | 6 | 1 |
| **K- 07 25 10 63** | G 1/2 | 720 | 68,8 | 180.8 mm (185.8 mm)* | 72,0 | 147,3 | 15 | 2 |

## Spare parts

| | |
|---|---|
| **K-HALTERBAUSATZ MULTIFIX** | Holder |
| **K-KOPPELPAKET MEHR** | Coupling packet |
| **K-KOPPELPAKET SCHMA** | Coupling packet |
| **K-AUTOMAT ABLASSVENTIL** | Automatic drain valve |
| **K-PC-BEHAELTER FILTER MULTIFIX** | Polycarbonate tank filter |
| **K-METALLBEHAELTER OELER MULTIFIX** | Metal tank oiler |

*Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.*