
K-FI AK KOH METALLBEHAEL MULTIFIX

Activated carbon filters with metal bowl

Properties

Input pressure	Max. 16 bar
Media temperature	max. 60 °C
Ambient temperature	Max. 60 °C
Sealant	NBR
Filter insert	Activated carbon-POM
Housing	Die-cast zinc
Drain valve	Semi-automatic
Residual oil content	0.005 mg/m3
Flow rate measurement	FA at P1 = 6 bar and Δp = 0.2 bar



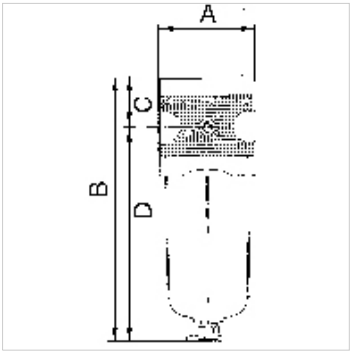

Note

Further information on request

Description

Micro-filters for compliance with strict compressed air purity requirements. Suitable for all applications where standard filters do not afford the desired efficiency.

Item

Identification	Thread	Flow rate (L/min)	A (mm)	B	C (mm)	D (mm)	DN	Size
K- 07 25 10 49	G 1/4	380	47,8	137.0 mm	27,0	110,0	6	1
K- 07 25 10 52	G 1/2	1500	68,8	168.2 mm	34,5	133,7	15	2

Spare parts

K-HALTERBAUSATZ MULTIFIX	Holder
K-KOPPELPAKET MEHR	Coupling packet
K-KOPPELPAKET SCHMA	Coupling packet
K-PC-BEHAELTER FILTER MULTIFIX	Polycarbonate tank filter
K-METALLBEHAELTER OELER MULTIFIX	Metal tank oiler

Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.