


K-L-STECK VB 2

Union elbows



Properties

| | |
|-----------------------|---------------------|
| Working pressure | Max. 16 bar |
| Operating temperature | -20 °C to +80 °C |
| Material | Nickel-plated brass |
| Contact pressure ring | Hostaform |
| Clamping ring | Stainless steel |

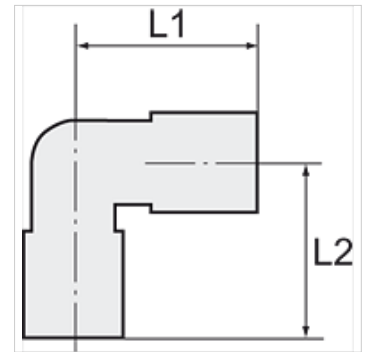

Note

Further information on request

Description

The advanced version of our highly successful push-in fittings series manufactured in nickel-plated brass. Advantages of this new, optimised series: Much easier connection and disconnection of the hose, even with repeated mounting, can also be used for non-calibrated hoses, suitable for vacuum operation.

Item

| Identification | for external hose Ø | L1 (mm) | L2 (mm) |
|----------------|---------------------|------------|------------|
| K- 07 40 25 34 | 3 mm | 10,4 | 10,4 |
| K- 07 40 25 35 | 4 mm | 16,7 | 16,7 |
| K- 07 40 25 36 | 5 mm | 19,2 | 19,2 |
| K- 07 40 25 37 | 6 mm | 19,0 | 19,0 |
| K- 07 40 25 38 | 8 mm | 21,3 | 21,3 |
| K- 07 40 25 39 | 10 mm | 23,3 | 23,3 |
| K- 07 40 25 40 | 12 mm | 26,0 | 26,0 |
| K- 07 40 25 41 | 14 mm | 29,3 | 29,3 |