K-W90 VERSCHR PFA


Union elbows - Perfluoroalkoxy alkane (PFA)

HANSA-FLEX

Properties

Operating pressure	Dependent on operating temperature; Max. 10 bar (at 20 °C); Max. 1 bar (at 170 °C)
Operating temperature	Max. 200 °C
Material	Perfluoroalkoxy alkane (PFA)



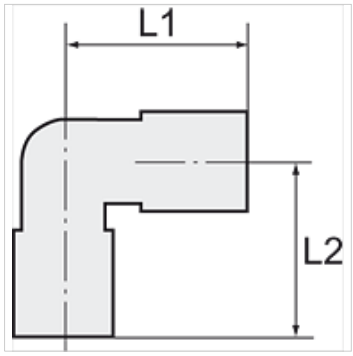

Note

Further information on request

Description

Perfluoroalkoxy alkane (PFA): A fluoroplastic (PTFE) with the same chemical resistance as PTFE but much stronger and suitable for temperatures up to 200°C.

Item

Identification	Thread	for hose	L1 (mm)	L2 (mm)
K- 07 40 41 80	G 1/8	4 mm / 6 mm	25,0	20,0
K- 07 40 41 82	G 1/8	6 mm / 8 mm	30,0	23,0
K- 07 40 41 84	G 1/8	8 mm / 10 mm	36,0	25,0
K- 07 40 41 87	G 1/4	4 mm / 6 mm	26,0	25,0
K- 07 40 41 89	G 1/4	6 mm / 8 mm	30,0	27,0
K- 07 40 41 91	G 1/4	8 mm / 10 mm	36,0	32,0
K- 07 40 41 94	G 3/8	4 mm / 6 mm	29,0	30,0
K- 07 40 41 96	G 3/8	6 mm / 8 mm	33,0	27,0
K- 07 40 41 98	G 3/8	8 mm / 10 mm	36,0	29,0
K- 07 40 42 01	G 1/2	4 mm / 6 mm	32,0	29,0
K- 07 40 42 03	G 1/2	6 mm / 8 mm	36,0	29,0
K- 07 40 42 05	G 1/2	8 mm / 10 mm	39,0	31,0

Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.