

K-SCHALLDAE SINTERBR FL MS

Silencers, sintered bronze, flat design with brass hexagon nut and brass thread


HANSA FLEX

Properties

Operating pressure Max. 10 bar

Operating temperature -10 °C to +200 °C

sound level 6bar 80 ~ 90 dB(A)

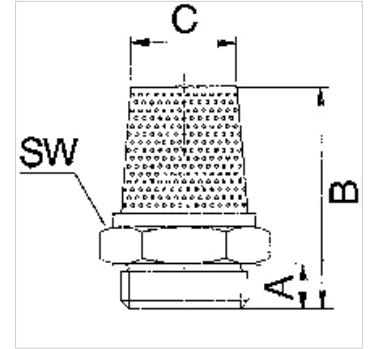

Description

For reducing the exhaust noise generated by pneumatic equipment.

Item

| Identification | Thread | A (mm) | B (mm) | C (mm) | AF |
|----------------|--------|-----------|-----------|-----------|-------|
| K- 07 40 35 16 | M 5 | 4,0 | 7,6 | 6,0 | 8 mm |
| K- 07 40 35 17 | G 1/8 | 5,5 | 10,5 | 11,0 | 13 mm |
| K- 07 40 35 18 | G 1/4 | 7,0 | 13,5 | 13,0 | 17 mm |
| K- 07 40 35 19 | G 3/8 | 7,5 | 16,0 | 17,0 | 22 mm |
| K- 07 40 35 20 | G 1/2 | 9,5 | 18,0 | 20,0 | 24 mm |