


# K-L-RINGSTUECK

Ring nipples, single

**HANSA FLEX**

## Properties

<b>Working pressure pulsate</b>	Max. 10 bar
<b>Pressure</b>	Max. 15 bar (depending on pipe quality)
<b>Suitable pipe materials</b>	PVDF, PTFE, stainless steel, PA, PU
<b>Standard</b>	G thread acc. to DIN EN ISO 228-1
<b>Ambient temperature</b>	-20 °C to max. +150 °C (depending on pipe quality and diameter)
<b>Material</b>	Stainless steel 1.4404
<b>Sealant</b>	FKM

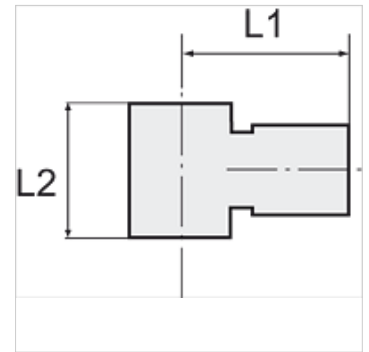

## Note

Further information on request

## Description

For use with aggressive media and in areas with corrosive outside influences, in the food processing industry and in hygienic and sanitary applications.

## Item

Identification	Thread	for external hose Ø	L1 (mm)	L2 (mm)
K- 07 40 47 10	G 1/8	4 mm	19,5	15,0
K- 07 40 47 11	G 1/8	6 mm	22,0	15,0
K- 07 40 47 12	G 1/8	8 mm	22,5	15,0
K- 07 40 47 08	G 1/4	6 mm	23,5	17,0
K- 07 40 47 09	G 1/4	8 mm	24,0	17,0
K- 07 40 47 07	G 1/4	10 mm	27,0	17,0
K- 07 40 47 13	G 3/8	10 mm	29,0	20,0
K- 07 40 47 14	G 3/8	12 mm	31,0	20,0
K- 07 40 47 06	G 1/2	12 mm	33,0	24,0