


### Properties

|                          |   |
|--------------------------|---|
| Working pressure pulsate | Max. 10 bar   |
| Pressure                 | Max. 15 bar (depending on pipe quality)                         |
| Suitable pipe materials  | PVDF, PTFE, stainless steel, PA, PU                             |
| Standard                 | G thread acc. to DIN EN ISO 228-1                               |
| Ambient temperature      | -20 °C to max. +150 °C (depending on pipe quality and diameter) |
| Material                 | Stainless steel 1.4404  |
| Sealant                  | FKM   |

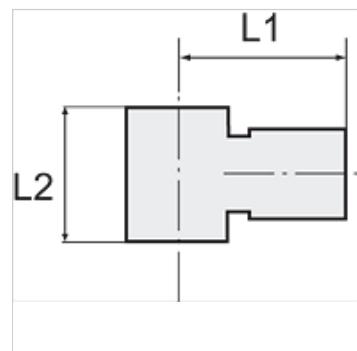

### Note

Further information on request

### Description

For use with aggressive media and in areas with corrosive outside influences, in the food processing industry and in hygienic and sanitary applications.

### Item

| Identification | Thread | for external hose Ø | L1<br>(mm) | L2<br>(mm) |
|----------------|--------|---------------------|------------|------------|
| K-07 40 47 10  | G 1/8  | 4 mm                | 19,5       | 15,0       |
| K-07 40 47 11  | G 1/8  | 6 mm                | 22,0       | 15,0       |
| K-07 40 47 12  | G 1/8  | 8 mm                | 22,5       | 15,0       |
| K-07 40 47 08  | G 1/4  | 6 mm                | 23,5       | 17,0       |
| K-07 40 47 09  | G 1/4  | 8 mm                | 24,0       | 17,0       |
| K-07 40 47 07  | G 1/4  | 10 mm               | 27,0       | 17,0       |
| K-07 40 47 13  | G 3/8  | 10 mm               | 29,0       | 20,0       |
| K-07 40 47 14  | G 3/8  | 12 mm               | 31,0       | 20,0       |
| K-07 40 47 06  | G 1/2  | 12 mm               | 33,0       | 24,0       |