



K-VHR 6KT MS NI

Hexagon head screw plugs

HANSA FLEX

Properties

| | |
|-----------------------|-----------------------------------|
| Operating temperature | Max. 150 °C |
| Pressure | Max. 60 bar |
| Design | Blanking screw, with hexagon head |
| Material | Nickel-plated brass |

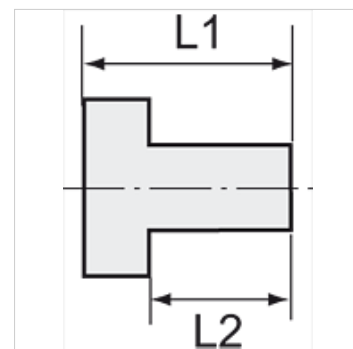

Note

The dimensions of the standard screw fittings may change slightly during the life of the catalogue as a result of optimisation processes.
Further information on request

Description

Suitable for air, water, oil, steam, etc.

Additional information

Further types and dimensions on request.

Item

| Identification | Thread | L1 (mm) | L2 (mm) | AF |
|----------------|--------|------------|------------|-------|
| K- 07 40 39 97 | M 5 | 7,0 | 4,0 | 8 mm |
| K- 07 40 39 98 | G 1/8 | 10,0 | 6,0 | 14 mm |
| K- 07 40 39 99 | G 1/4 | 12,5 | 8,0 | 17 mm |
| K- 07 40 40 00 | G 3/8 | 13,5 | 9,0 | 19 mm |
| K- 07 40 40 01 | G 1/2 | 15,5 | 10,0 | 24 mm |
| K- 07 40 40 02 | G 3/4 | 16,5 | 11,0 | 30 mm |
| K- 07 40 39 96 | G 1 | 19,0 | 13,0 | 38 mm |