


K-VHRO IS OR MS NI

Hexagon socket screw plugs with O-ring



Properties	
Operating temperature	Max. 80 °C (with O-ring, NBR)
Pressure	Max. 60 bar
Design	Blanking screw with hexagon socket
Material	Nickel-plated brass

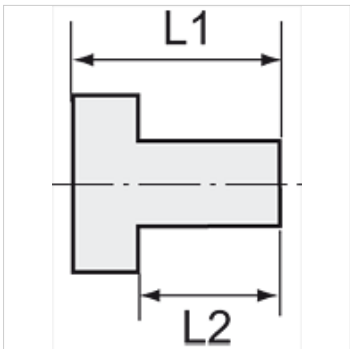

Note
The dimensions of the standard screw fittings may change slightly during the life of the catalogue as a result of optimisation processes.
Further information on request

Description
Suitable for air, water, oil, steam, etc.

Additional information
Further types and dimensions on request.

Item				
Identification	Thread	hexagon socket (mm)	L1 (mm)	L2 (mm)
K- 07 40 39 91	M 5	2,5	6,5	4,0
K- 07 40 39 92	G 1/8	3,0	9,5	7,0
K- 07 40 39 93	G 1/4	6,0	11,0	8,0
K- 07 40 39 94	G 3/8	8,0	12,5	9,0
K- 07 40 39 95	G 1/2	10,0	14,5	11,0
K- 07 40 44 09	G 3/4	17,0	20,0	15,5
K- 07 40 44 10	G 1	19,0	21,0	16,0